

DEVELOPMENT OF SIDE COUPLED X-BAND MEDICAL LINEAR ACCELERATOR FOR RADIOTHERAPY*

Y. S. Lee[†], G. J. Kim, S. H. Kim, J. H. Lee, I. S. Kim, Y. W. Choi, J. I. Kim^{††},
Medical Device Research Center, Korea Electrotechnology Research Institute, Ansan 15588,
Republic of Korea

J. H. Hwang^{1,2}, A.R Kim^{1,2}, J. N. Kim^{1,2}, J. S. Shin^{1,2}, Y. J. Seol^{1,2}, T. G. Oh^{1,2}, Y. A. Oh²,
Y. N. Kang^{2,3}

¹Department of Biomedicine & Health Sciences, The Catholic University of Korea, Seoul 06591,
Republic of Korea

²Advanced Institute for Radiation Fusion Medical Technology, College of Medicine,
The Catholic University of Korea, Seoul 06591, Republic of Korea

³Department of Radiation Oncology, Seoul St. Mary's Hospital, College of Medicine,
The Catholic University of Korea, Seoul 06591, Republic of Korea

Abstract

Recently, LINAC-based radiotherapy equipment are being developed by combining with imaging devices such as CT or MRI, so that it is possible to precisely focus high dose radiation on tumor tissues while minimizing the normal tissue damage. In order to place the diagnostic and treatment devices simultaneously in a confined space, constraints related to interference and volume between the subsystems must be considered. To meet these requirements, the size and weight of the LINAC system need to be reduced, which can be achieved by applying X-band technology. For the purpose of use in IMRT based on image guided radiotherapy, we developed a 9.3 GHz X-band medical LINAC using side-coupled structure. The LINAC is designed to have the accelerating field strength of 16.8 MV/m, and the beam current transmission efficiency of 26 % at the end of accelerating cell when the supplied RF power is at 1.7 MW. Therefore, it can accelerate the electron beam up to 6.2 MeV with having about 90 mA beam current. We plan to carry out the performance test using beam diagnostics system and X-ray measurement system, and the details of design and experimental results of LINAC will be described in this paper.

DESIGN OF X-BAND LINAC

RF Cavity Structure

The developed 9.3 GHz X-band LINAC system accelerates electron beam and finally produce high energy X-rays and, the specifications are shown in Table 1. The RF cavity include 4 bunching cells, 20 accelerating cells, coupler port and vacuum port (see Fig. 1). The side coupling method is applied to distribute RF energy supplied from magnetron, which is an external RF source, to each cell inside cavity. The advantage of the side coupling method is higher acceleration efficiency per unit length, so it is possible to make

the LINAC length shorter. In addition, since the cavity operate with $\pi/2$ mode which has the largest mode spacing comparing with other mode, it has advantage related to the performance and stability [1].

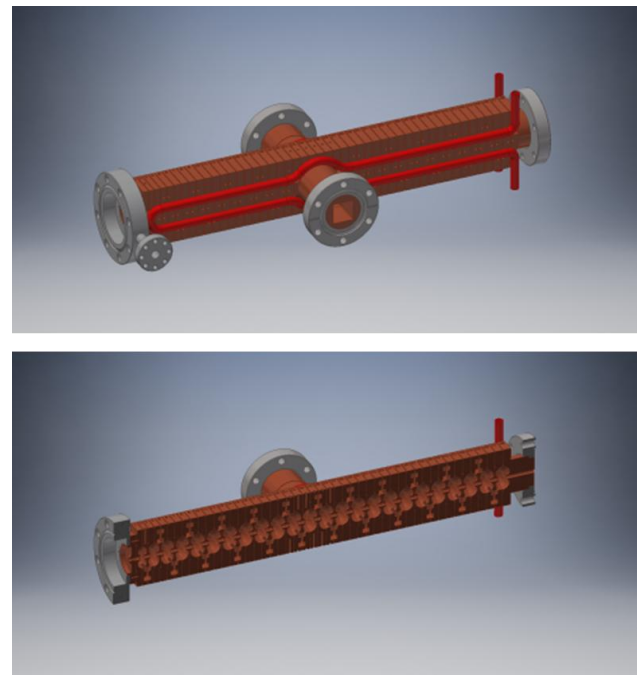


Figure 1: X-band RF cavity.

The total length of the RF cavity is 42 cm, which includes the flange for assembly. When 1.7 MW of RF power is supplied from the magnetron to the LINAC system, the RF loss is occurred in the coupler port and the RF module such as 4-port circulator and directional coupler, so the 1.58 MW of RF power is actually transmitted to the RF cavity. In this RF condition, the LINAC system is designed to generate the 90 mA electron beam 6.2 MeV.

Electron Gun Type

For the radiation therapy, the triode e-gun is mainly used, because it is essential to precisely control the beam current

* This research was supported by the KERI Primary Research Program of MSIT/NST (No. 18-12-N0101-42)

[†]yongseok@keri.re.kr

^{††}sky@keri.re.kr

PERFORMANCE TEST

RF Cold Test

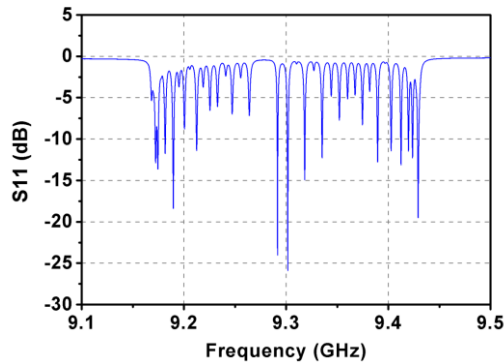


Figure 5: RF spectrum of the cavity.

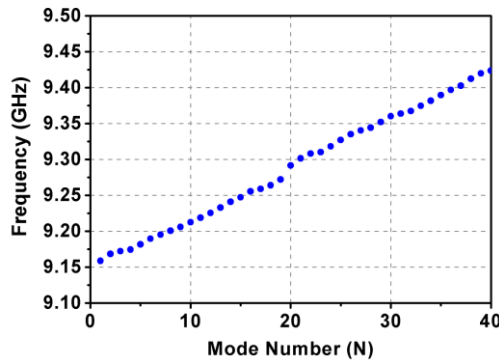


Figure 6: Dispersion curve of the cavity.

As shown in Fig. 5, the S11 parameters were measured to analyze RF resonance characteristics of the fabricated cavity after brazing process. We analyzed the existence of the stop band in the dispersion curve plot and it was confirmed that the fabricated cavity operates with the desired $\pi/2$ mode properties (see Fig. 6).

RF High Power Conditioning

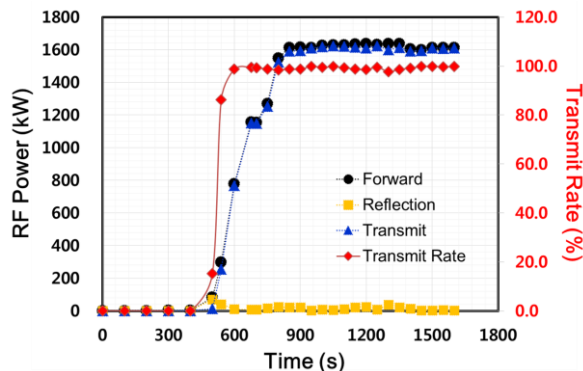


Figure 7: RF power and transmission ratio.

A newly fabricated RF cavity frequently undergoes arcing or breakdown in the high accelerating field due to the scratches or the impurities inside cavity. Therefore, it is necessary to provide RF input strength gradually from low power before supplying full RF power to LINAC. The field

strength can be controlled by adjusting the pulse repetition frequency (PRF) and the pulse width. This process allows LINAC to maintain a stable state without arcing even when full RF power required for operating is supplied. The fabricated RF cavity is able to maintain the RF transmission ratio at about 95% or more (see Fig. 7).

Electron Gun Activation

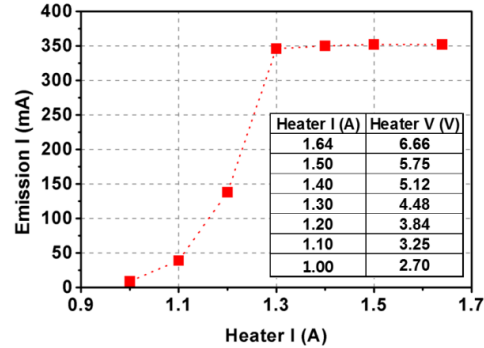


Figure 8: E-gun activation result.

The e-gun activation is the stabilization process for e-gun with emitting a steady electron flow. A fully activated e-gun has a constant emission region as shown in Fig. 8. Operating in this region after activation will allow current emit to be stable even with cathode temperature variation.

FUTURE WORKS

The recent trend related to the development of radiotherapy devices is fusion with imaging devices, so there are needs for miniaturization and weight reduction of LINAC system. Therefore, we developed 9.3 GHz X-band side coupled standing wave LINAC, and have finished the fundamental performance test. We have plan to measure the diameter, energy and beam current of the accelerated electron beam using the electron beam diagnostic system. After this process, we will perform QA processes to measure the X-ray energy, beam profile (flatness, symmetry, and penumbra) and dose rate based on the AAPM TG51, 142 Protocol.

REFERENCES

- [1] U. Amaldi, S. Braccini, P. Puggioni, "High Frequency Linacs for Hadrontherapy", *Rev. Accel. Sci. Technol.*, vol. 2, pp. 111–131, 2009.
- [2] J. Shao *et al.*, "Development of a C-band 6 MeV standing wave linear accelerator", *Phys. Rev. ST Accel. Beams*, vol. 16, p. 090102, 2013.
- [3] S. Hanna, *RF Linear Accelerators for Medical and Industrial Applications*. Norwood, MA, USA: Artech House, 2012.