






This material is based upon work supported by the U.S. Department of Energy, Office of Science, National Quantum Information Science Research Centers, Superconducting Quantum Materials and Systems Center (SQMS) under contract number DE-AC02-07CH11359

Wavelike Dark Matter Searches with SRF Cavities and Superconducting Qubits at SQMS

Raphael Cervantes
SQMS, Fermilab

What is Dark Matter?

Can it be Axions? Dark Photons?

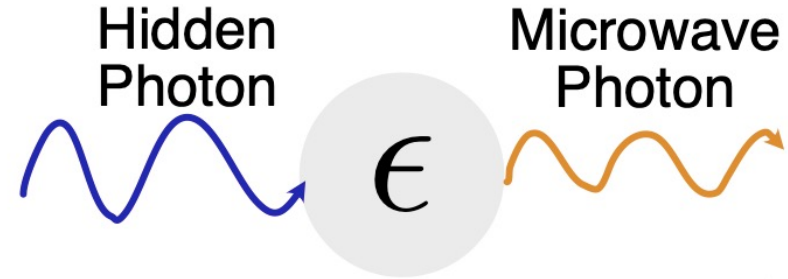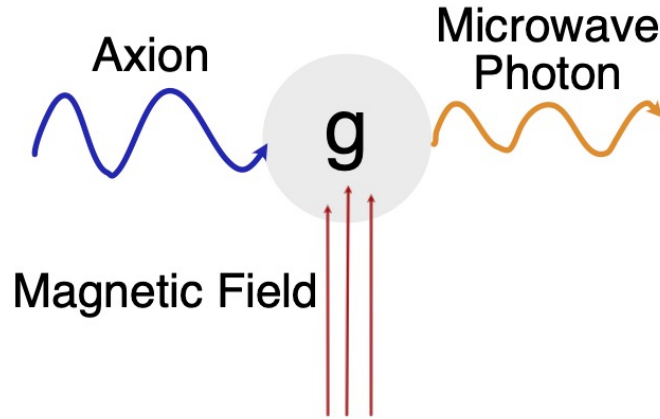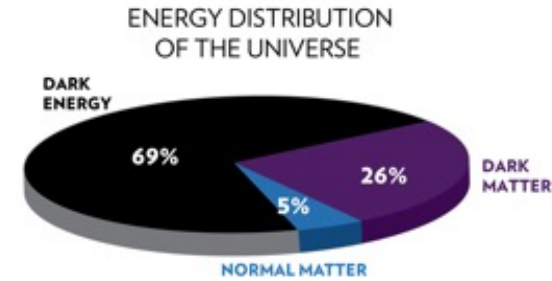


Credit: A. Dixit

Feeble interaction with photons.

We can look for that.

Haloscope Search for Dark Matter

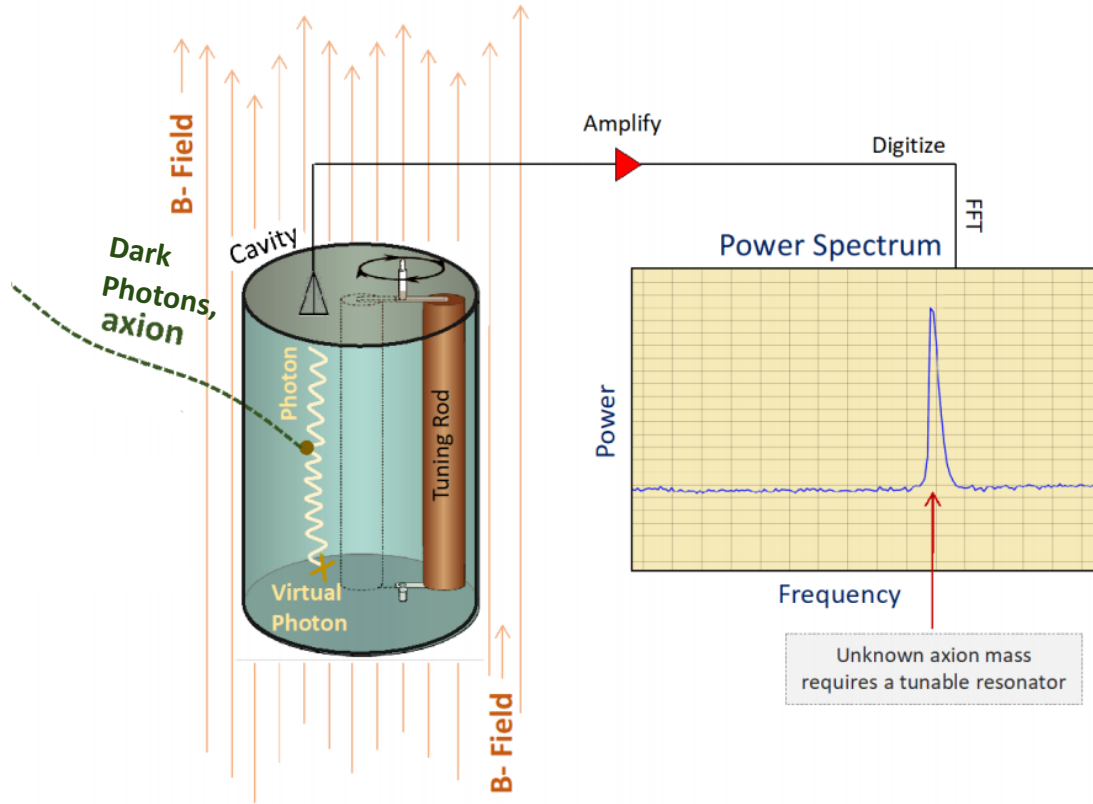


Microwave cavities can be used to detect dark photons and axions.

Dark photon searches don't need B-field.

Looking for $< 10^{-24}$ W signal over wide range of frequencies.

Credit: C. Boutan


No axions were found (yet).

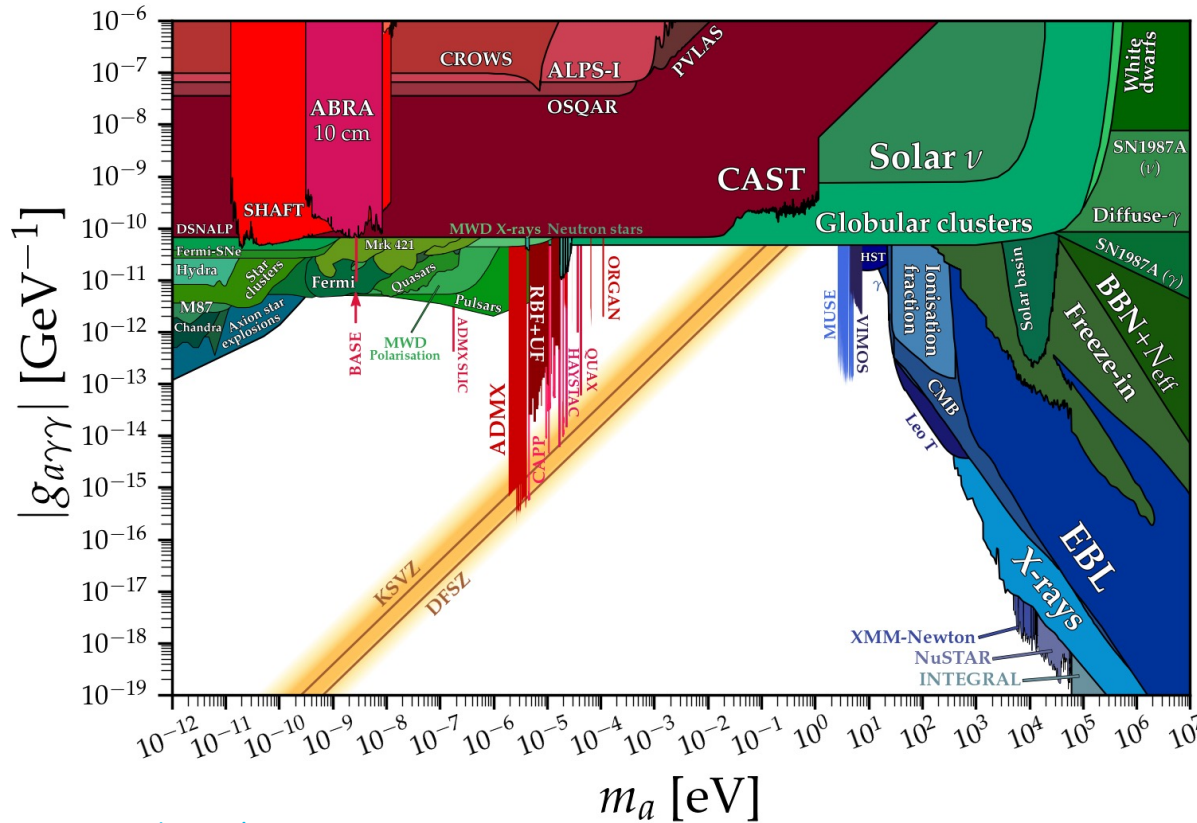

Credit: C. O'Hare

- No discovery, but still progress because of the excluded parameter space.
- But a lot more parameter space left to explore.

SRF Cavities for Dark Matter Searches

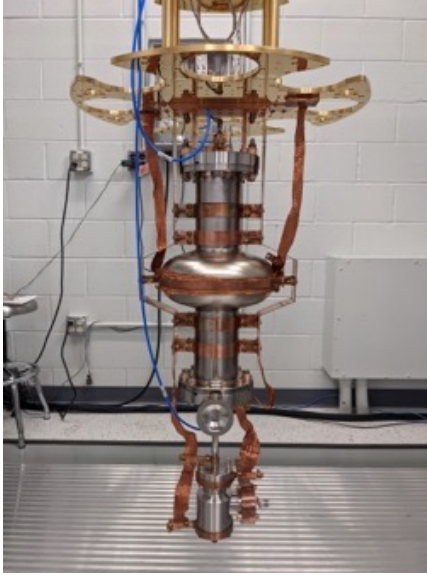

Compared
to copper-
based
searches




Credit: N. Du

$$\text{SQMS} \rightarrow Q \approx 10^{10}$$

$$\text{ADMX and CAPP} \rightarrow Q \approx 10^5$$

High Q allows for larger signal and lower noise floor.
Possibly factor 10^5 increase in instantaneous scan rate.

Instantaneous scan rate is proportional to Q_L

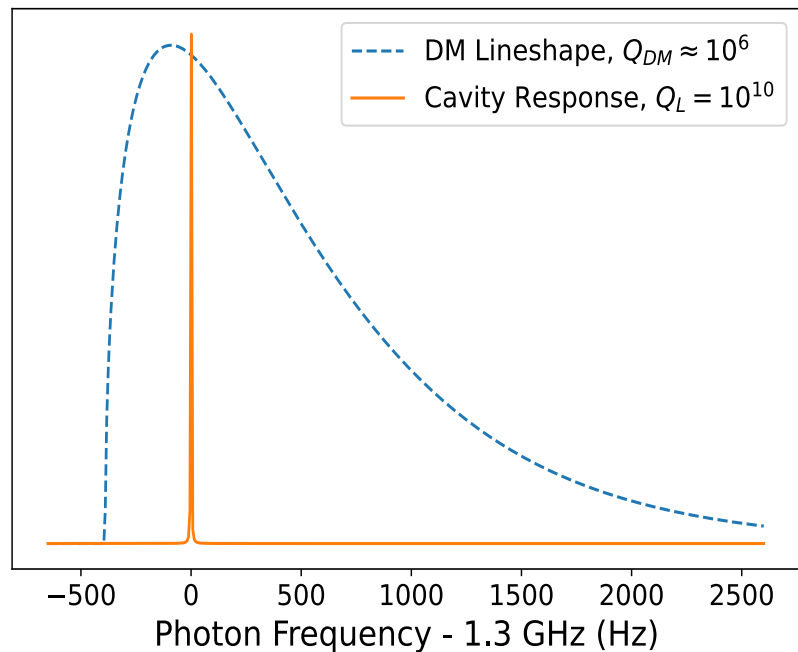

For virialized axions

$$\frac{df}{dt} \sim Q_L Q_{DM} \left(\frac{\eta \chi^2 m_{A'} \rho_{A'} V_{eff} \beta}{\text{SNR} T_n (\beta + 1)} \right)^2$$


even if $Q_L \gg Q_{DM}$

- Signal power $P_s \propto \min(Q_L, Q_{DM})$
- Noise power reduces with Q_L .
- Tuning steps $\Delta f \propto \Delta f_{DM}$. Cavity sensitive to distribution of possible DM rest masses.

More details: [arXiv:2208.03183](https://arxiv.org/abs/2208.03183)

SERAPH: SupERconducting Axion and Paraphoton Haloscope

Family of SQMS SRF haloscope experiment. Name works on different levels.

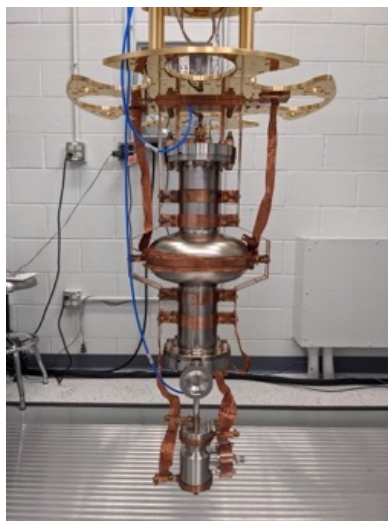

SRF




Seraphine




Sir Raph(ael)


SERAPHv1: Parasitic Search for Dark Photons

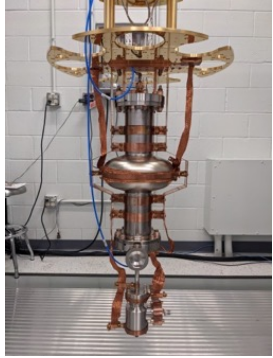

$$\begin{aligned}T_c &\approx 35 \text{ mK} \\ Q_L &\approx 5 \times 10^9 \\ f_0 &= 1.295 \text{ GHz} \\ \beta &\sim 1.3\end{aligned}$$


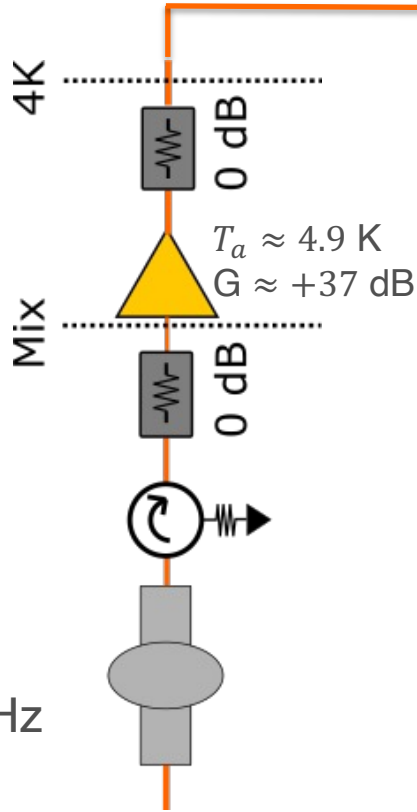


No DP signal. Just noise.

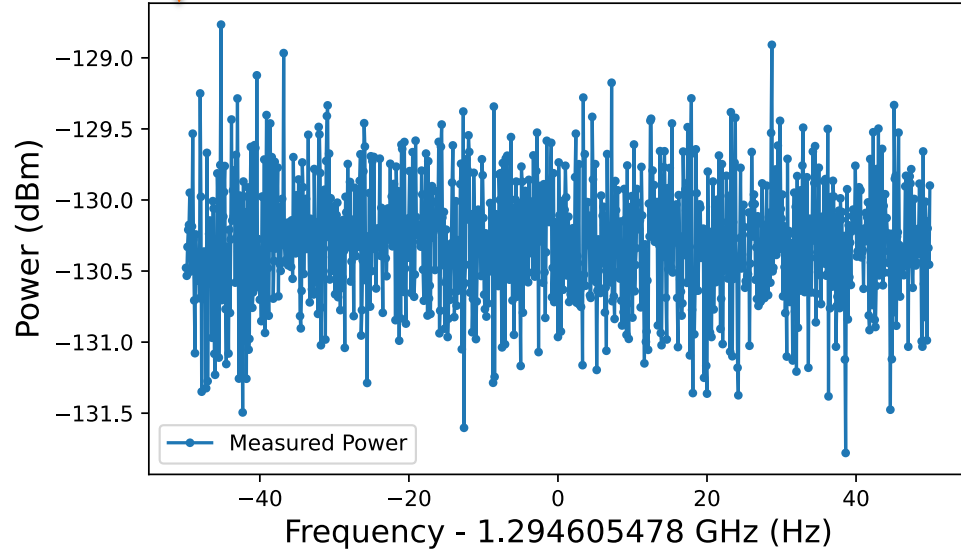

1000 seconds integration time

Deepest sensitivity: Ultrahigh Q for Dark photon DM

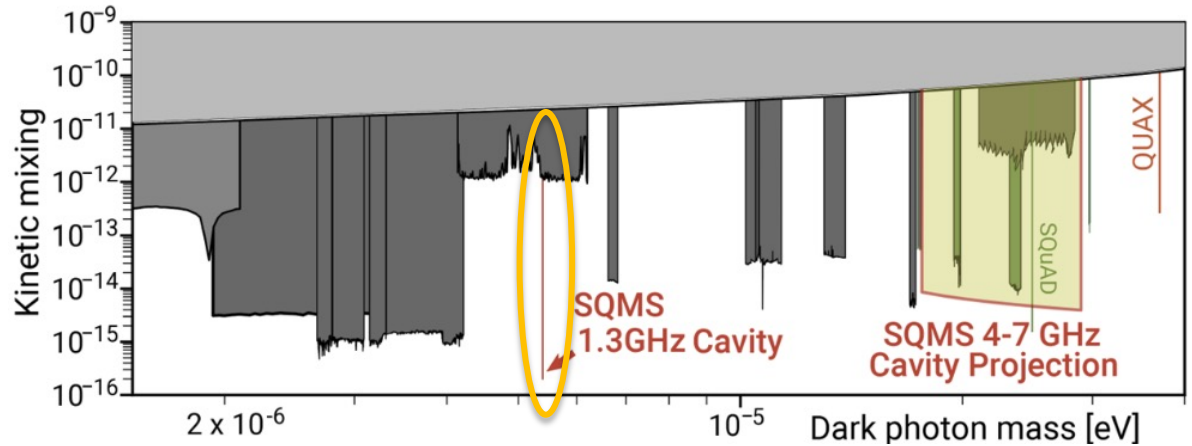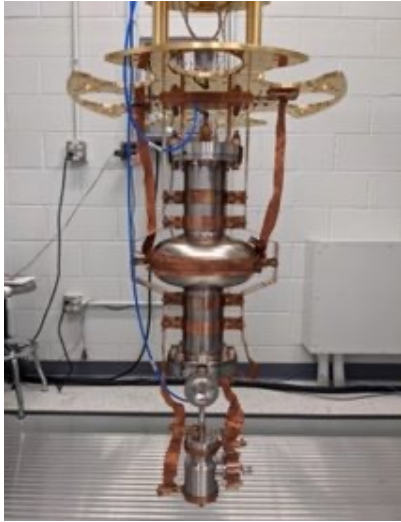

Cervantes et al., arXiv:2208.03183v3 (2022)


DPDM search in DR with 1.3 GHz cavity with $Q_0 \approx 10^{10}$.

Deepest exclusion to wavelike DPDM by an order of magnitude.

Next steps:


- Tunable DPDM search from 4-7 GHz (“low hanging fruit”)
- Implement photon counting to subvert SQL noise limit.

Microphonics

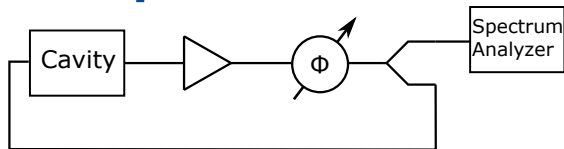


- Measured with self-excitation loop and phase noise analyzer+spectrum analyzer.
- 25 Hz RMS
- Mitigated by turning off pulse tubes (7 Hz RMS), but not viable for a dark matter search.

PNA measurement

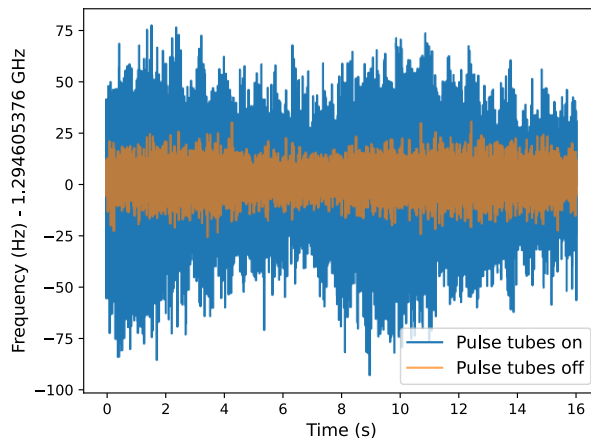


FFT of PNA measurement

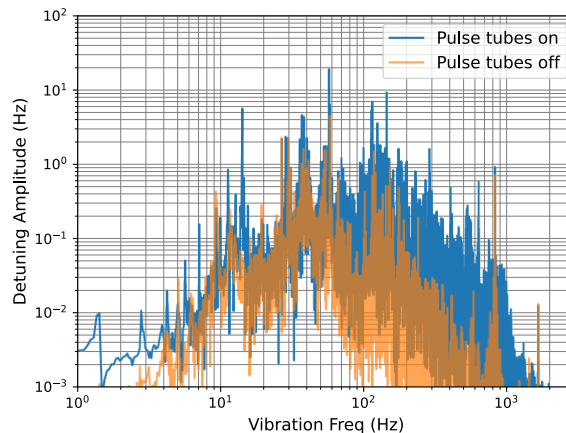


Microphonics and Frequency Modulation

Creates modulation of dark matter signal. Power gets spread into sidebands.

FFT of PNA measurement

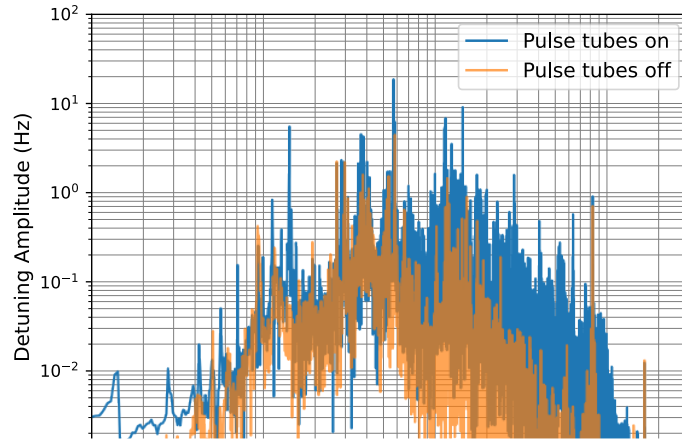


SA measurement

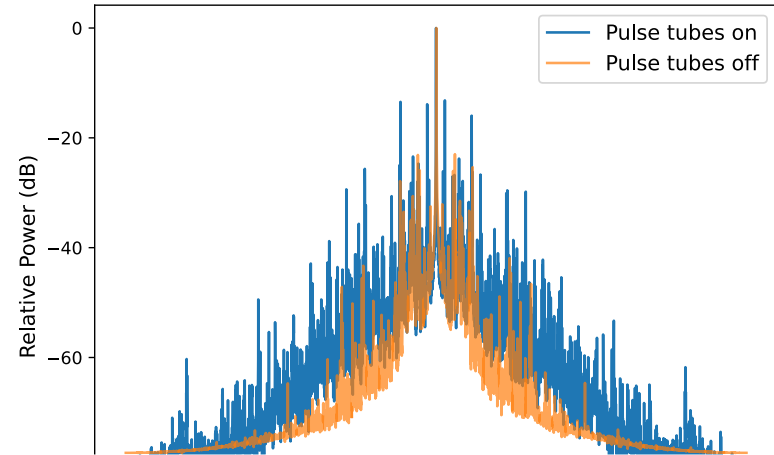


Modulation Frequency f_m (Hz)	Detuning Amplitude f_Δ (Hz)	Modulation Index $\frac{f_m}{f_\Delta}$	Carrier amplitude (dBc)	Sideband amplitude (dBc)
14.3	5.5	0.4	-0.32	-14.5
57.2	18.2	0.3	-0.22	-16.1

Microphonics and Frequency Modulation

Creates modulation of dark matter signal. Power gets spread into sidebands.

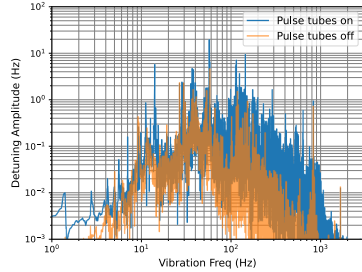

Modulation Frequency f_m (Hz)	Detuning Amplitude f_Δ (Hz)	Modulation Index $\frac{f_m}{f_\Delta}$	Carrier amplitude (dBc)	Sideband amplitude (dBc)
14.3	5.5	0.4	-0.32	-14.5
57.2	18.2	0.3	-0.22	-16.1

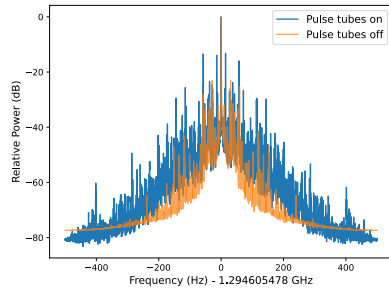


Carrier band attenuated by 0.54 dBc.

DM signal attenuated $\eta \approx 0.88$


Might recover if analysis looks for sidebands.

Tunable search with 1.3 GHz Cavity (SERAPH v1.1)

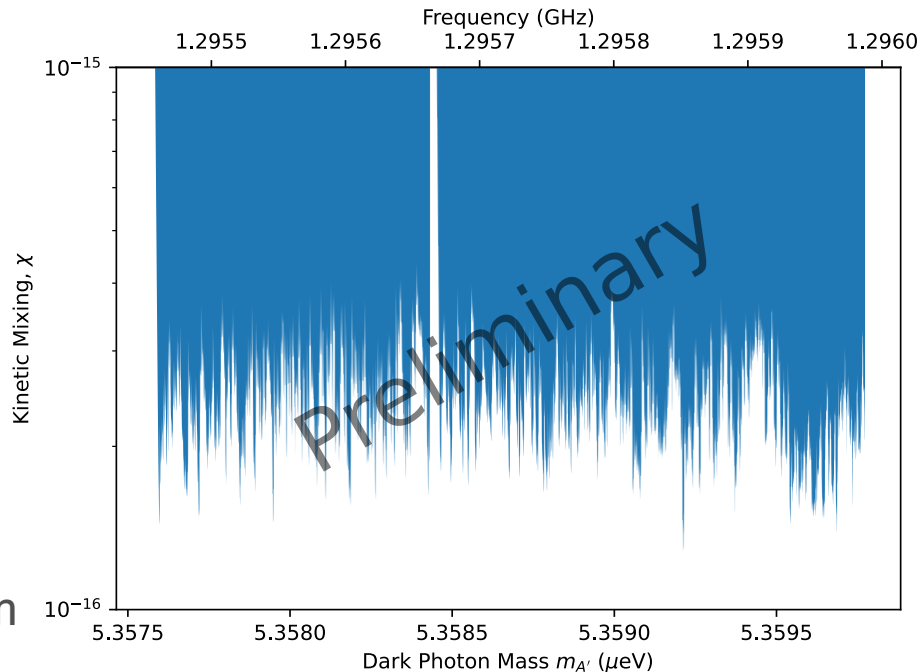


Similar 1.3 GHz cavity in liquid helium bath. Tunes by mechanical compression for 500 kHz tuning range. $T_{\text{cav}} = 1.4 \text{ K}$, $Q_L = 2.4 \times 10^8$. Very overcoupled.

Deepest sensitivity: Ultrahigh Q for Dark photon DM

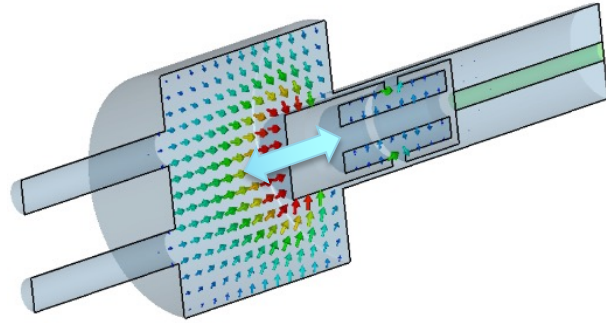

“plunger” cavity
4-7 GHz

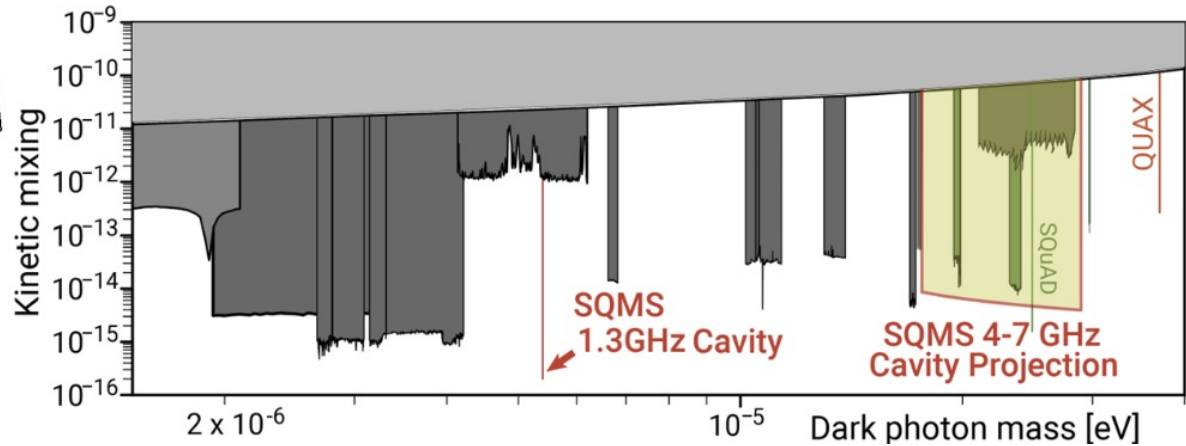

Cervantes et al., arXiv:2208.03183v3 (2022)




DPDM search in DR with 1.3 GHz cavity with $Q_L \approx 10^{10}$.

Deepest exclusion to wavelike DPDM by an order of magnitude.

Next steps:

- Tunable DPDM search from 4-7 GHz (“low hanging fruit”)
- Implement photon counting to subvert SQL noise limit.


Simulated and measured modes

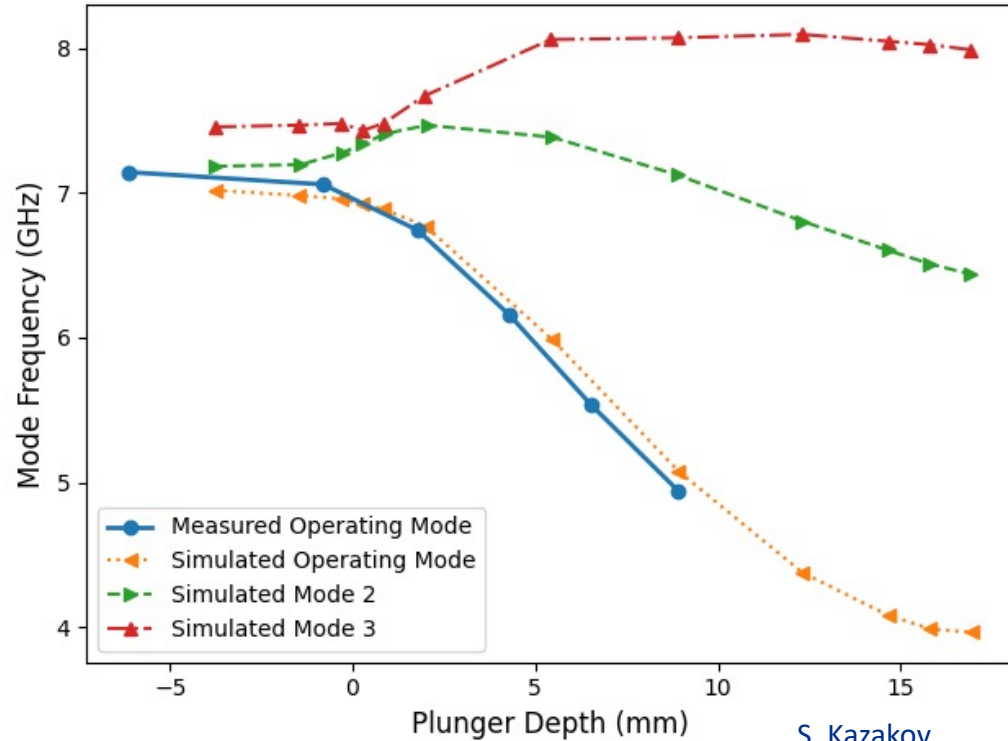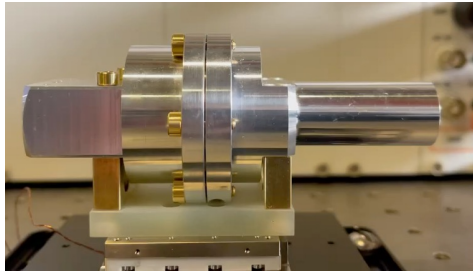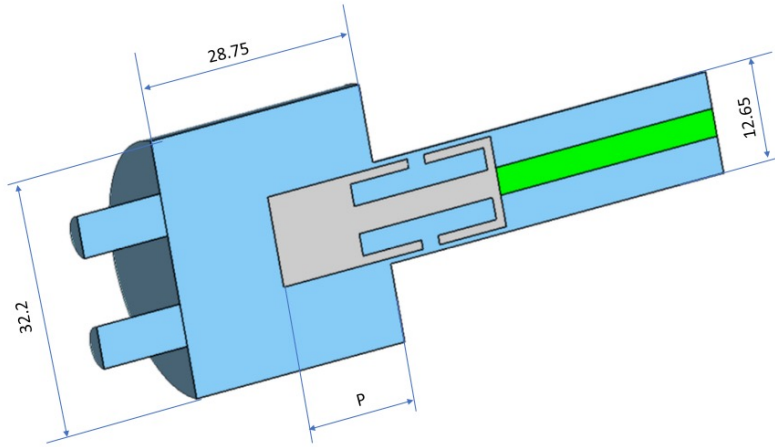

S. Kazakov


Straightforward tuning. No mode crossings. Good agreement between measurement and simulation.

Measured Unloaded Q with decay measurement

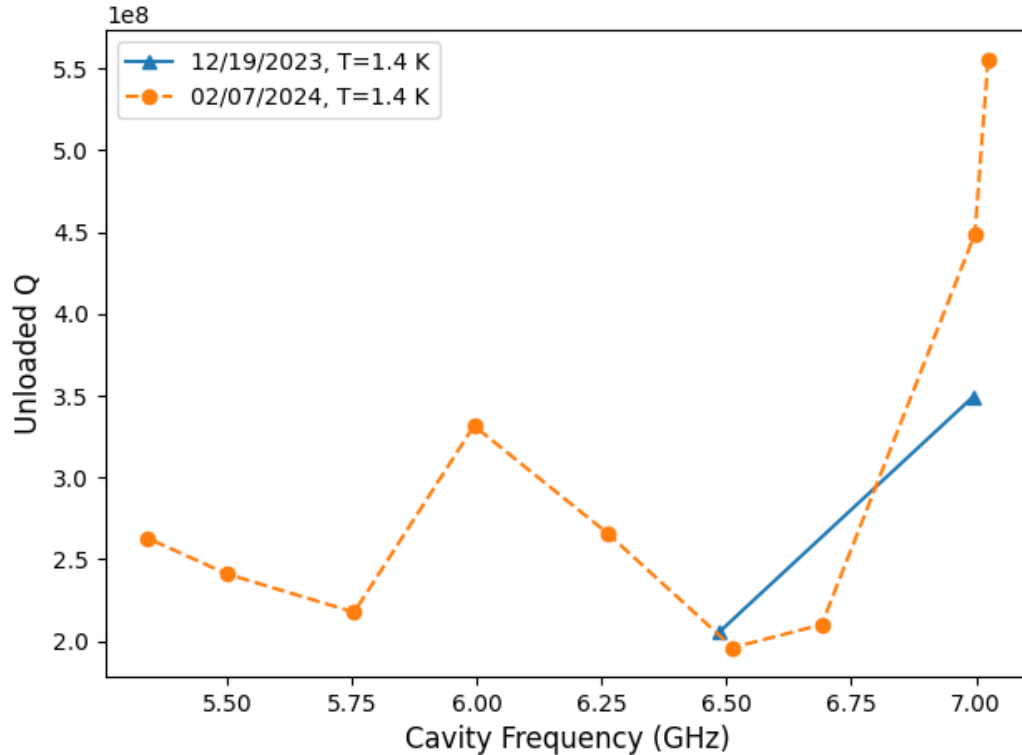

Cavity Q is acceptable for now.
Surface resistance could be reduced with more optimized surface treatment.

Microphonics with SEL + Phase Noise Analyzer

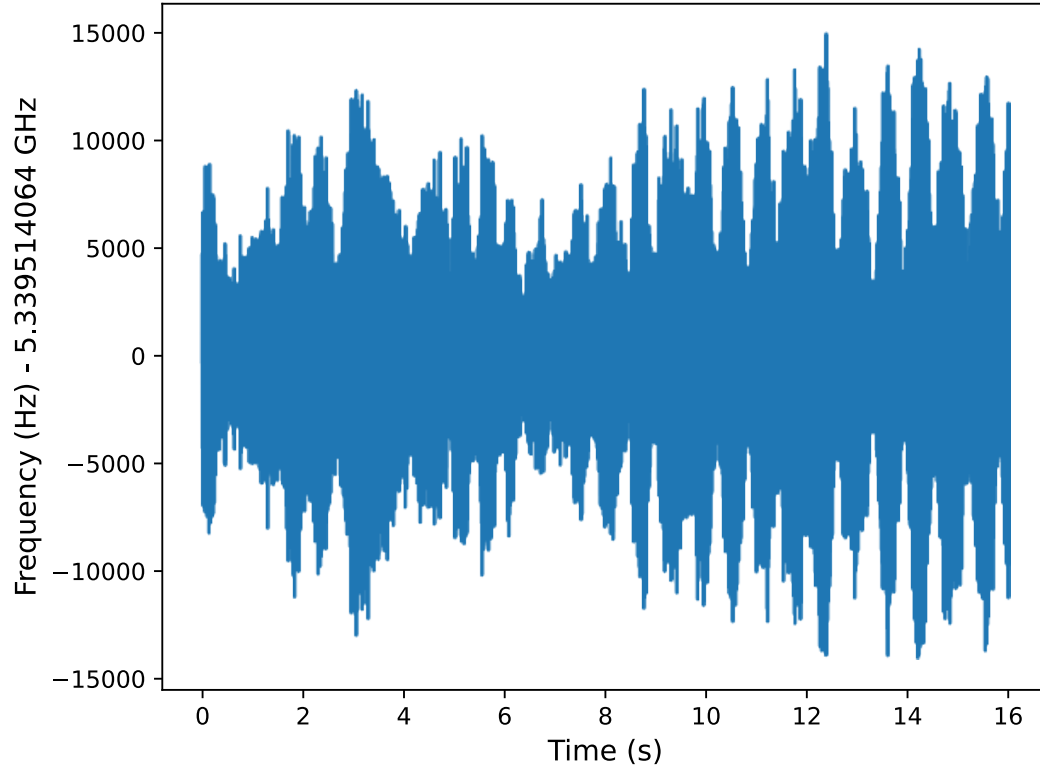


Can destabilize microphonics if there's too much energy in the system.


The RMS of the microphonics is 4.6 kHz!

Currently brainstorming how to mitigate.

Subverting SQL noise with qubit-based photon counting

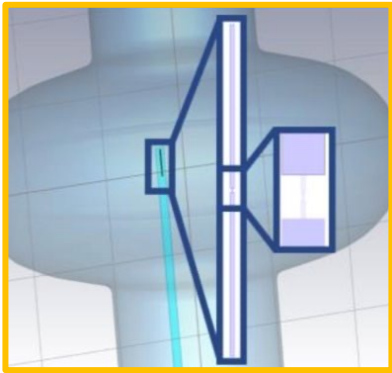

Superconducting qubit in SRF cavity.

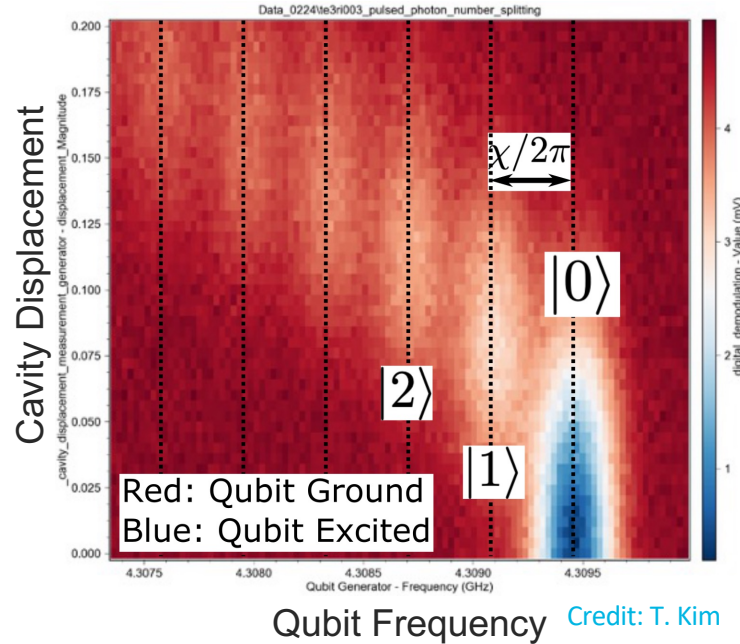

Quantum protocols counts photons non-destructively.




SQL noise: hf/k
240 mK @ 5 GHz

dominates
compared to 30 mK
thermal photons.

Regularly perform
photon counting with
dispersive
measurements.

Detour: The Transmon Qubit


Transmon device image

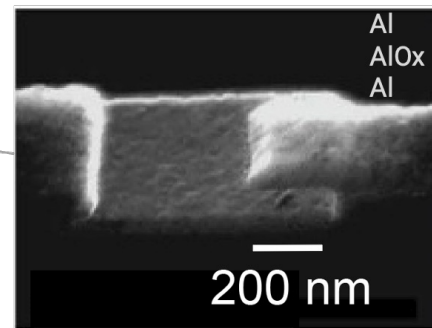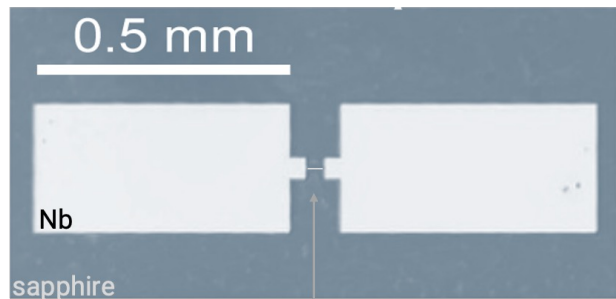

Wang et al., Nature Comm. 5, 5836 (2014)


Credit: Jens Koch

Detour: The Transmon Qubit

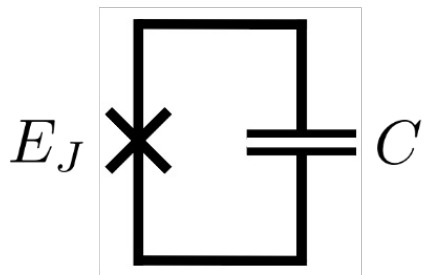

Introduce nonlinearity:
replace inductor with
Josephson junction

$$H = \frac{Q^2}{2C} - E_J \cos(\overbrace{2\pi\Phi/\Phi_0}^{\varphi})$$

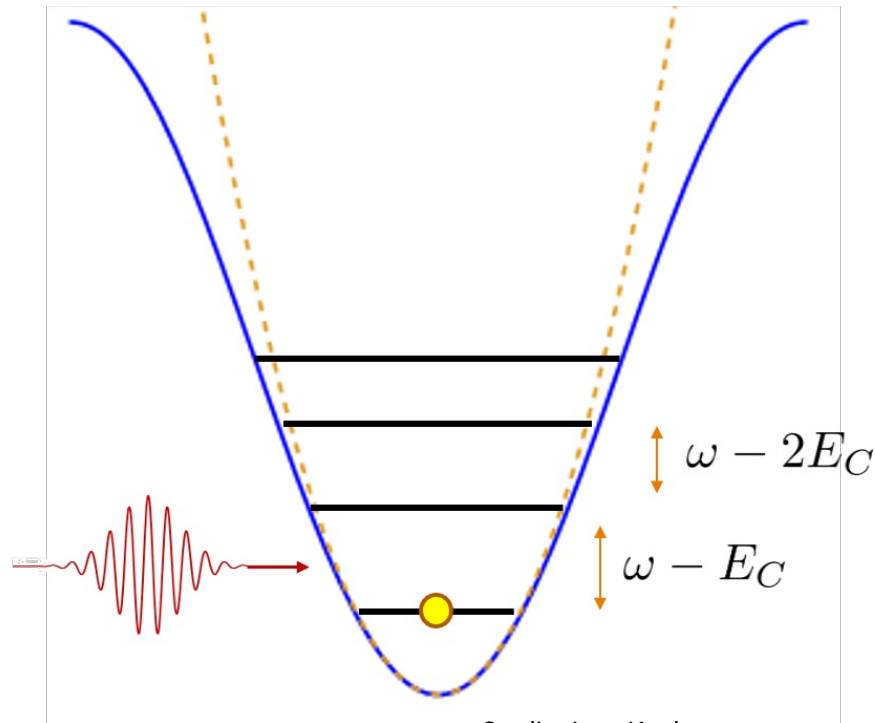

Credit: Jens Koch




Count Photons with Superconducting Qubits

$$\mathcal{H}/\hbar = \omega_c a^\dagger a + \frac{1}{2}(\omega_q + 2\chi a^\dagger a)\sigma_z$$

Qubit frequency depends on
of photons.


Can avoid quantum noise if
you just count the number of
photons and don't try to
measure their phase.

We can use superconducting
qubits to count microwave
photons inside the cavity.

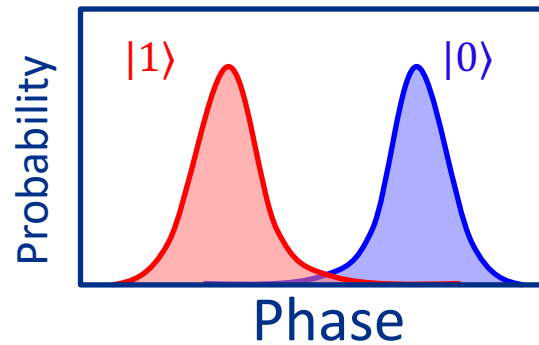
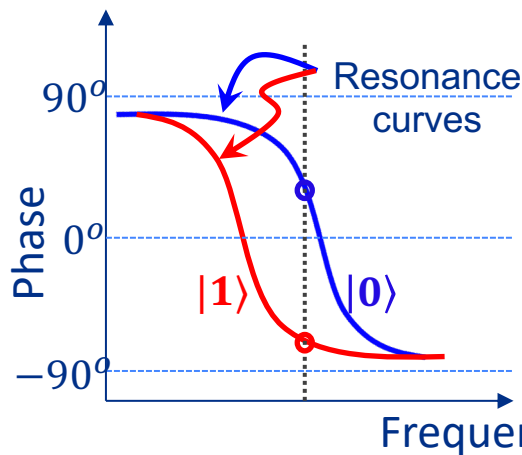
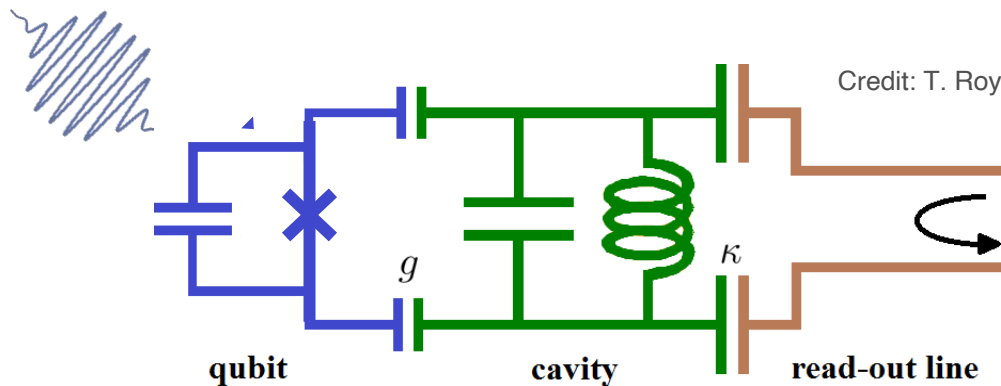


Dilution fridge ~ 10 mK

Current photon counting scheme

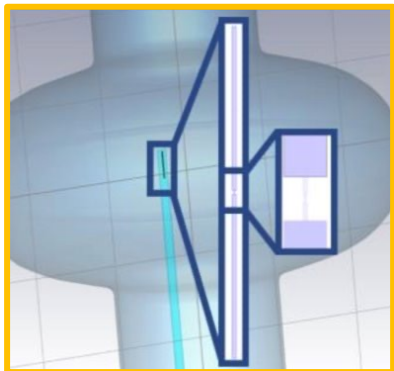

Measurements
performed by
Taeyoon Kim

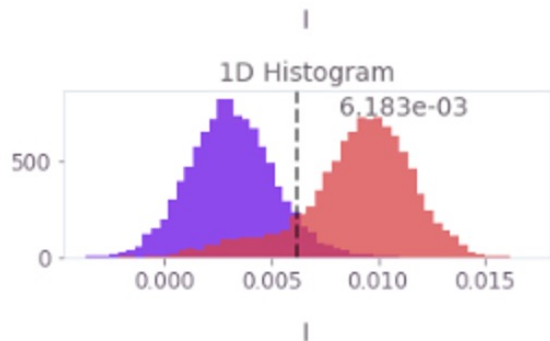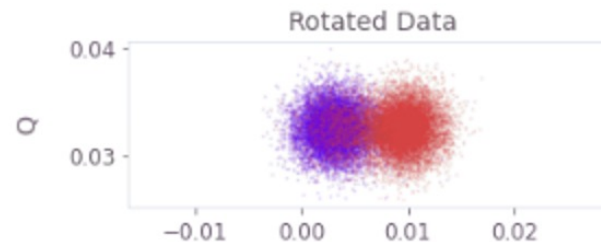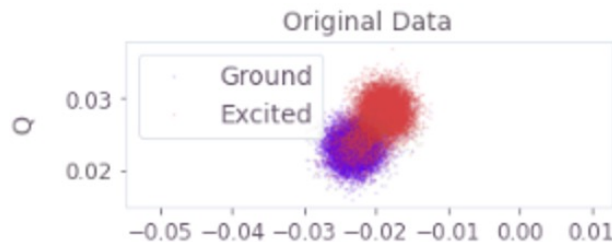


Fidelities

	$ g\rangle$	$ e\rangle$
Prepared $ g\rangle$	93.2%	6.8%
Prepared $ e\rangle$	13.3%	86.7%
	$ g\rangle$	$ e\rangle$

Measured

Qubit $T_1 \sim 150 \mu\text{s}$. Readout rate is 1/ms


Parity measurement maps cavity state onto qubit

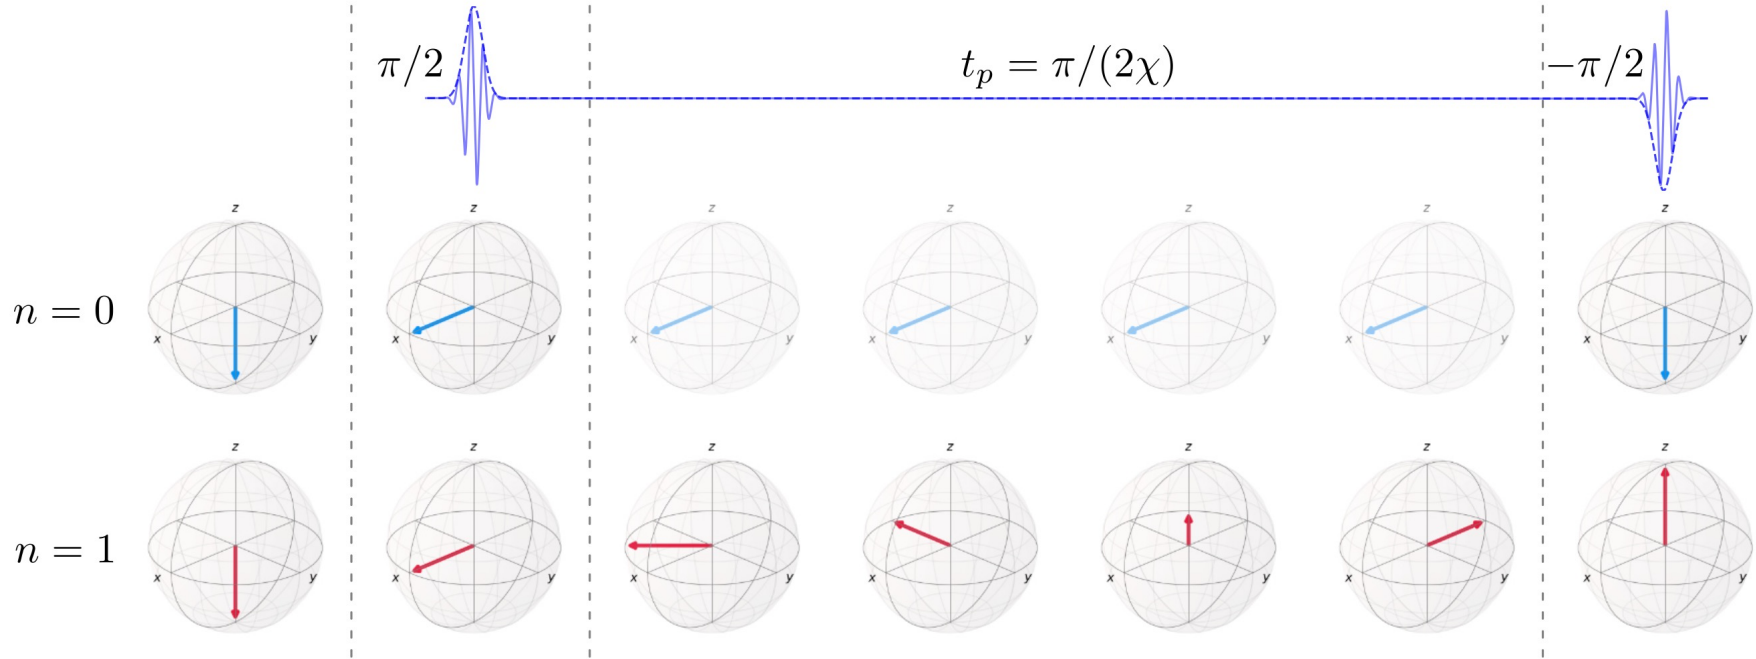

Credit: A. Dixit

Photon counting results

5000 Parity Measurements

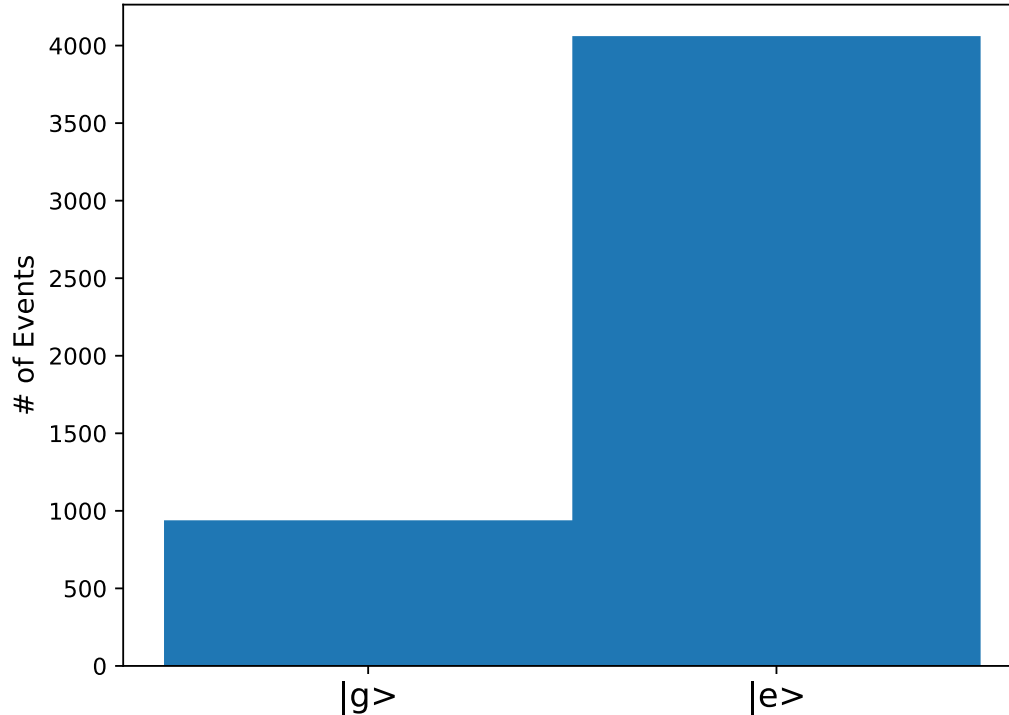

Parity measurement where qubit is prepared in ground state and we apply two $+\pi/2$ pulses.


With perfect readout:

$|g\rangle$ corresponds to 1 photon.

$|e\rangle$ corresponds to 0 photon.

Can use fidelity matrix and characteristics of the system to derive dark photon limit.

Why we need photon counting

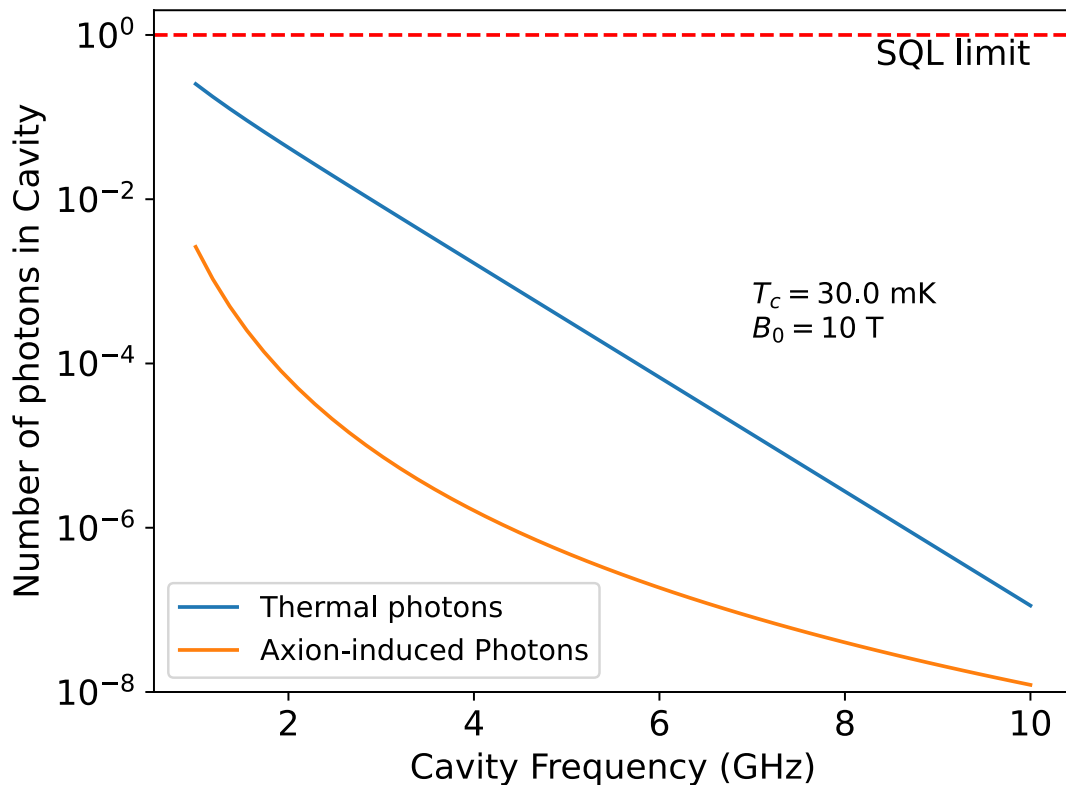


$$V_c = 136 L \times \left(\frac{f}{1 \text{ GHz}} \right)^{-3}$$

$$Q_L = 80\,000 \times \left(\frac{f}{1 \text{ GHz}} \right)^{-\frac{2}{3}}$$

$$n_c = \frac{1}{\exp\left(\frac{hf}{k_b T}\right) - 1}$$

SQL noise
dominates at higher
frequencies. Need
to mitigate SQL.

Would take long time to scan DFSZ with single cavity

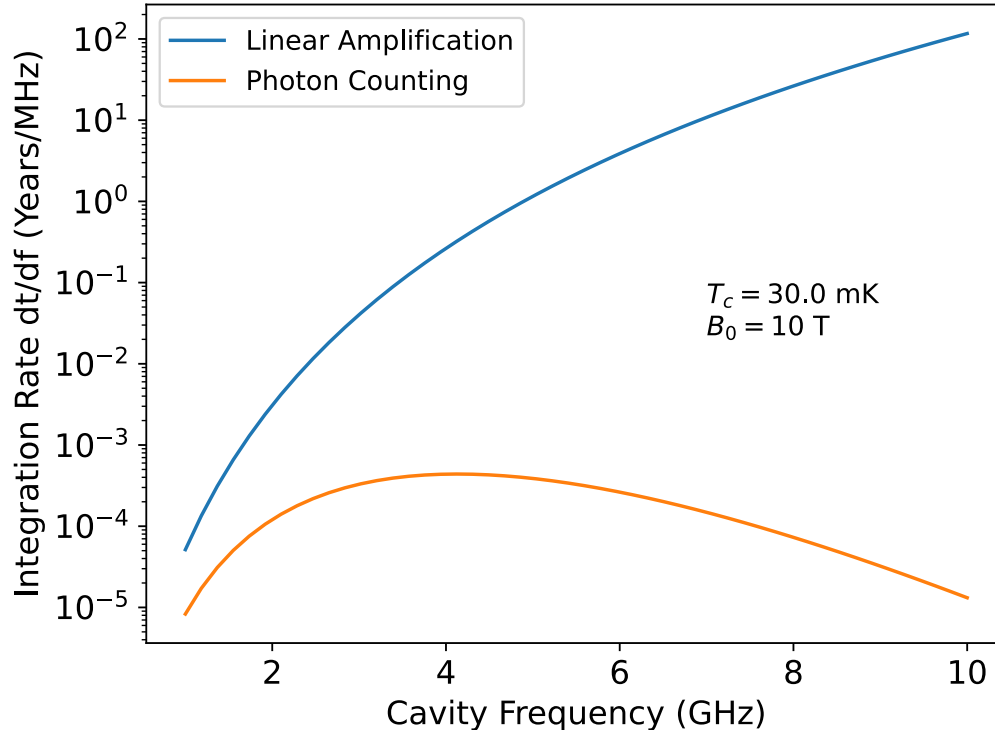


$$V_c = 136 L \times \left(\frac{f}{1\text{GHz}} \right)^{-3}$$

$$Q_L = 80\,000 \times \left(\frac{f}{1\text{GHz}} \right)^{-\frac{2}{3}}$$

$$n_c = \frac{1}{\exp\left(\frac{hf}{k_b T}\right) - 1}$$

Note: photon counting estimate doesn't yet take into account counter errors. Numerical estimates sensitive to engineering parameters.





If $Q \sim 10^{10}$ cavities work in an 8T field

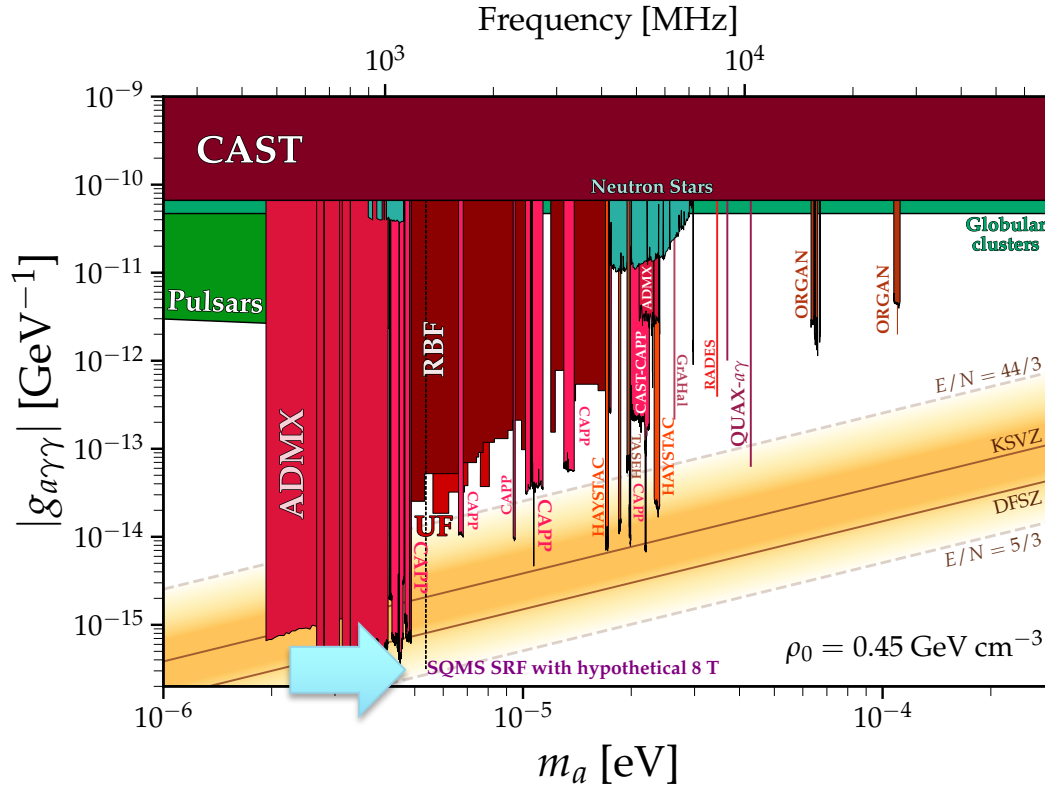

Sensitivity to
QCD axion with
single cavity and
HEMT.

Just make
 $Q \sim 10^{10}$ cavities
work in magnetic
fields!

Nb₃Sn Cavities in Multi-Tesla Field R&D at Fermilab

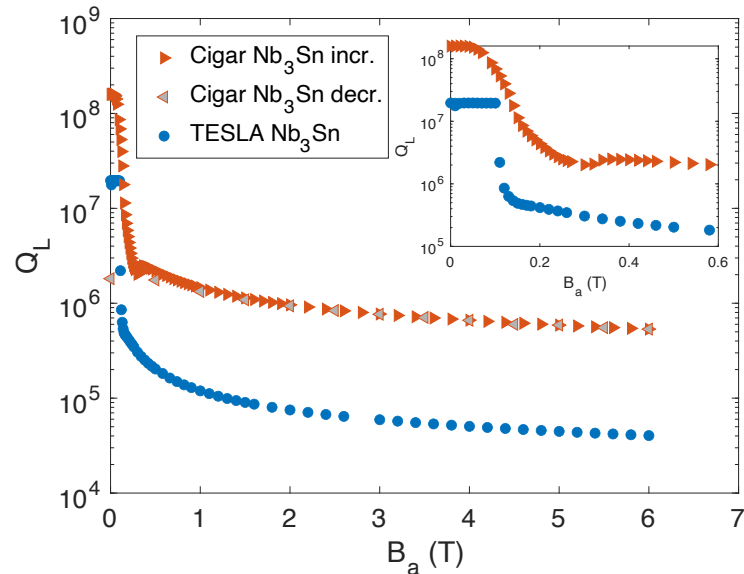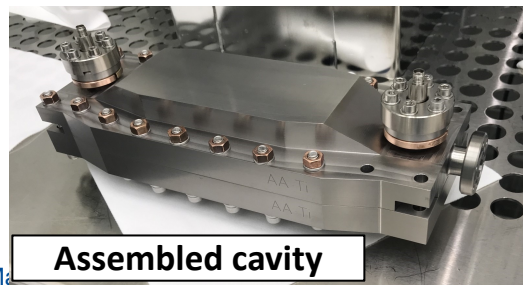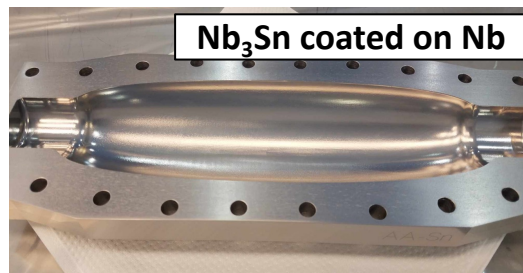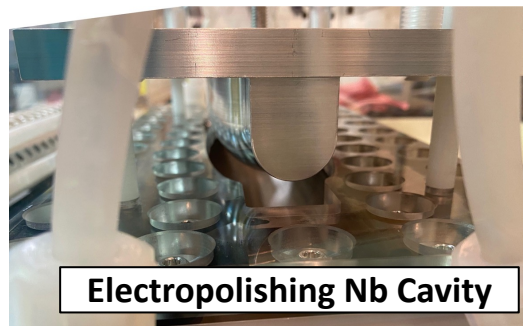

Q_0 of 5×10^5 at 6 T, 4.2 K, 3.9 GHz

PHYSICAL REVIEW APPLIED

Highlights Recent Subjects Accepted Collections Authors Referees Search


Open Access

High-Quality-Factor Superconducting Cavities in Tesla-Scale Magnetic Fields for Dark-Matter Searches

S. Posen, M. Checchin, O.S. Melnychuk, T. Ring, I. Gonin, and T. Khabiboulline
 Phys. Rev. Applied **20**, 034004 – Published 5 September 2023



Summarize

- Ultra-high Q cavities have achieved unprecedented sensitivity to wavelike DPDM and can boost by scan rate by orders of magnitude.
- Progress towards photon counting and high-Q cavities in magnetic fields for axion searches. Will be enabling technologies for future axion searches.

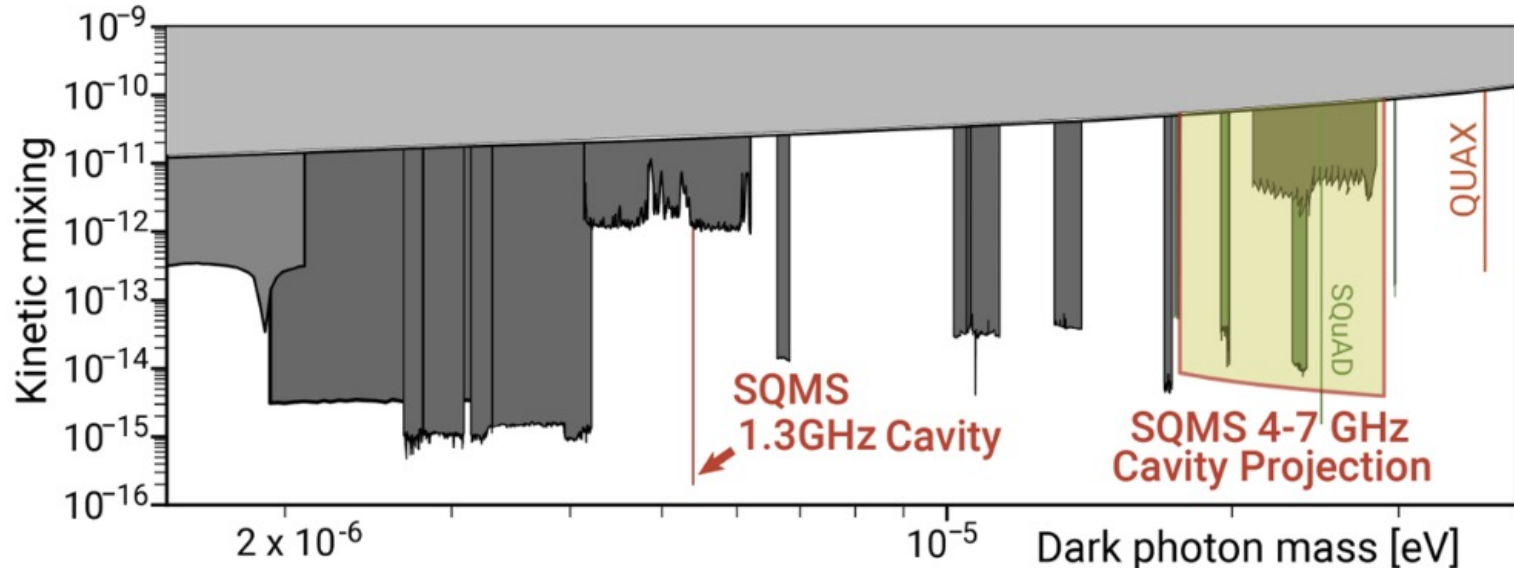


backup

Noise calibration with Variable Temperature Stage

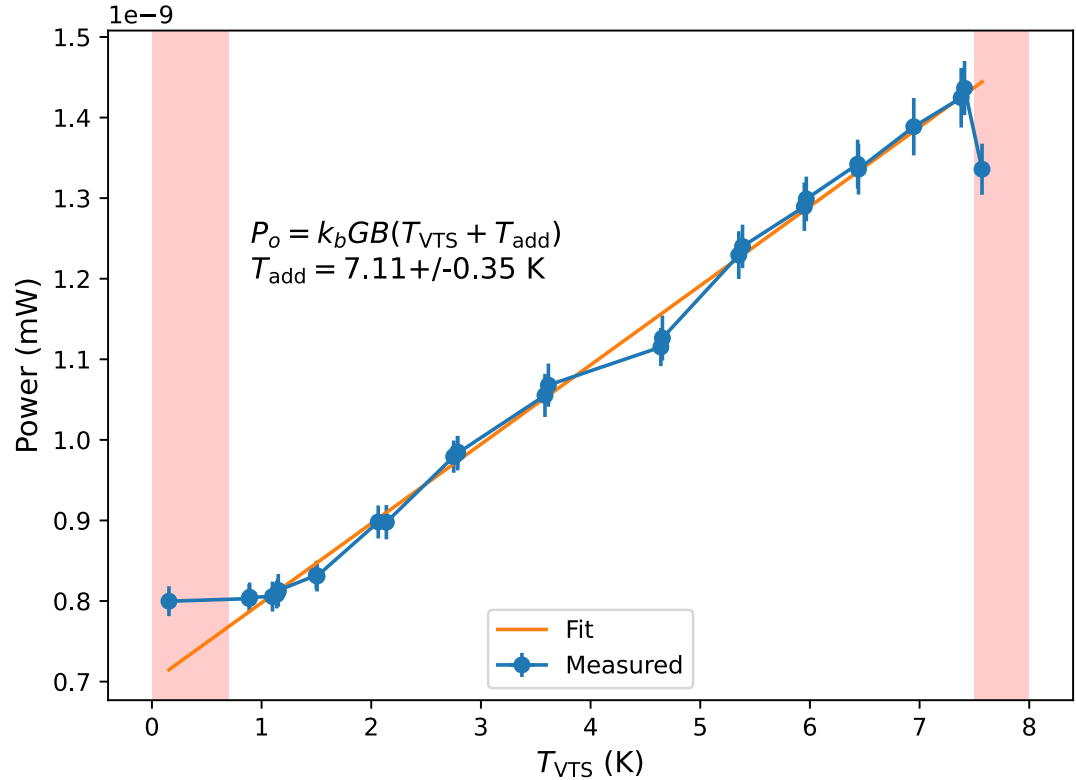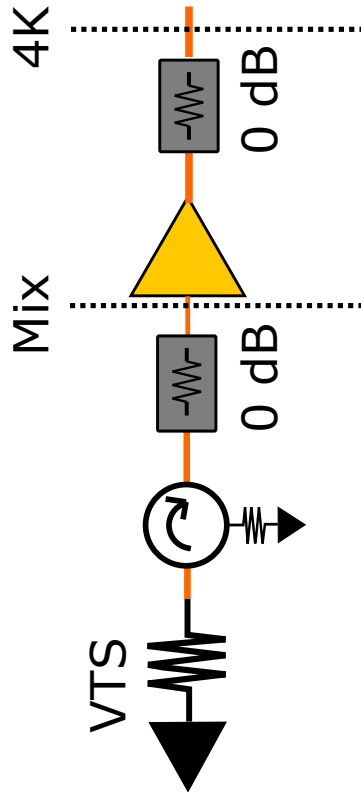


T_{add} consistent with 4.6 K amplifier noise and 2 dB insertion loss.


Measure Q with decay measurement

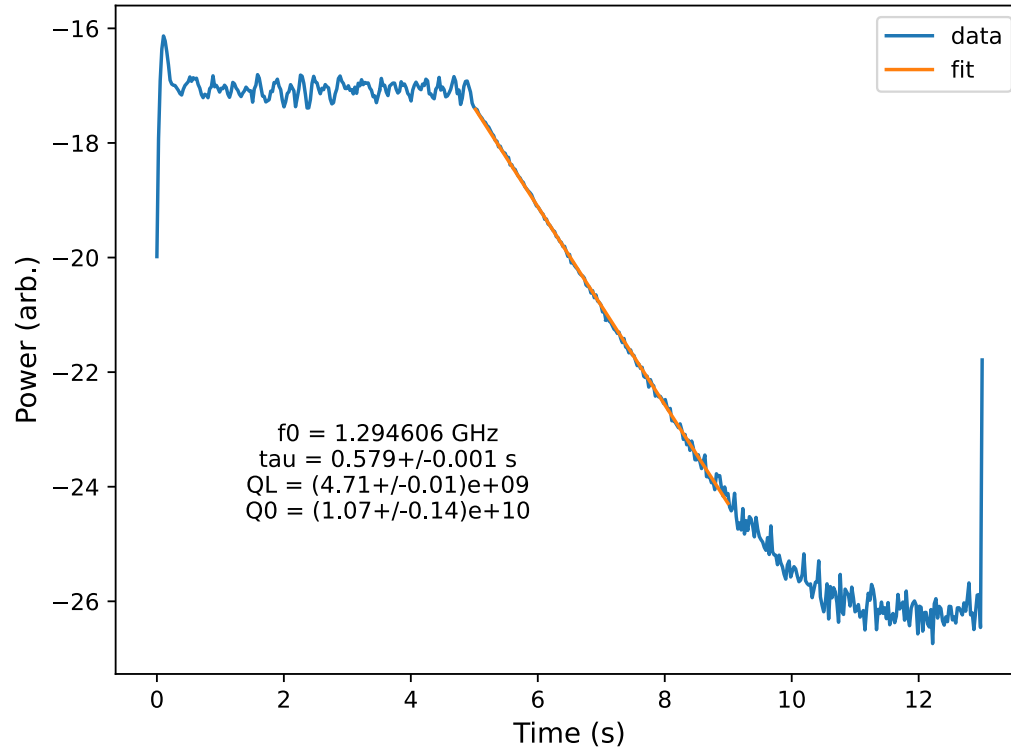

Excluded Dark Photon Parameter Space

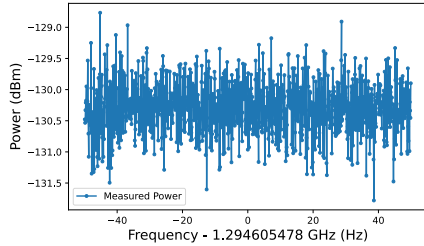

haloscope
analysis

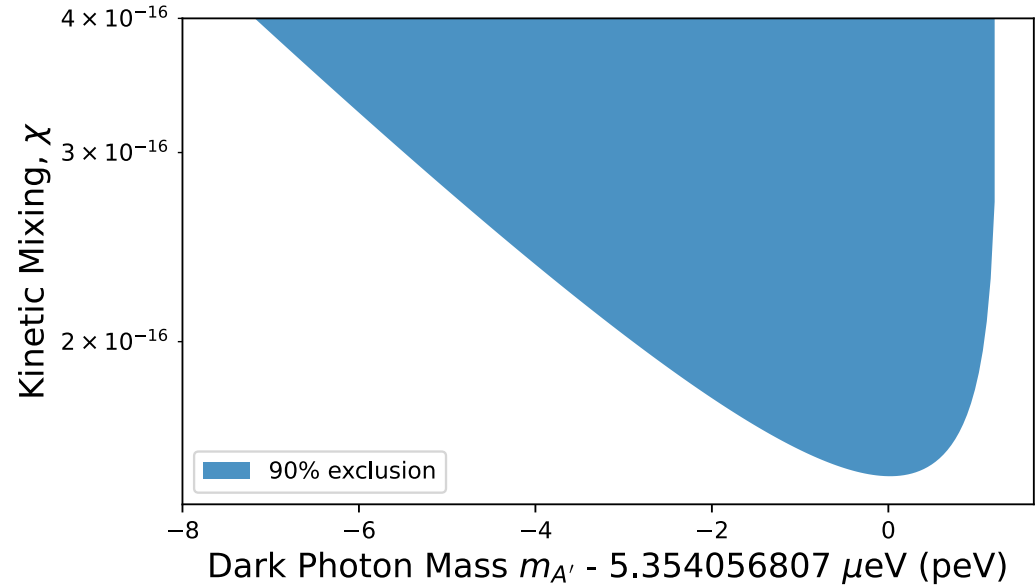

In review purgatory.
Measurements recently
performed to address
reviewer comments.

[arXiv:2208.03183](https://arxiv.org/abs/2208.03183)

Similar experiment posted by Chinese collaboration

SRF Cavity Searches for Dark Photon Dark Matter: First Scan Results

Zhenxing Tang,^{1,2,*} Bo Wang,^{3,*} Yifan Chen,⁴ Yanjie Zeng,^{5,6} Chunlong Li,⁵ Yuting Yang,^{5,6} Liwen Feng,^{1,7} Peng Sha,^{8,9,10} Zhenghui Mi,^{8,9,10} Weimin Pan,^{8,9,10} Tianzong Zhang,¹ Yirong Jin,¹¹ Jiankui Hao,^{1,7} Lin Lin,^{1,7} Fang Wang,^{1,7} Huamu Xie,^{1,7} Senlin Huang,^{1,7} and Jing Shu^{1,2,12,†}

¹School of Physics and State Key Laboratory of Nuclear Physics and Technology, Peking University, Beijing 100871, China

²Beijing Laser Acceleration Innovation Center, Huairou, Beijing, 101400, China

³International Centre for Theoretical Physics Asia-Pacific,
University of Chinese Academy of Sciences, 100190 Beijing, China

⁴Niels Bohr International Academy, Niels Bohr Institute, Blegdamsvej 17, 2100 Copenhagen, Denmark

⁵CAS Key Laboratory of Theoretical Physics, Institute of Theoretical Physics,
Chinese Academy of Sciences, Beijing 100190, China

⁶School of Physical Sciences, University of Chinese Academy of Sciences, No. 19A Yuquan Road, Beijing 100049, China

⁷Institute of Heavy Ion Physics, Peking University, Beijing 100871, China

⁸Institute of High Energy Physics, Chinese Academy of Sciences, Beijing 100049, China

⁹Key Laboratory of Particle Acceleration Physics and Technology,
Chinese Academy of Sciences, Beijing 100049, China

¹⁰Center for Superconducting RF and Cryogenics, Institute of High Energy Physics,
Chinese Academy of Sciences, Beijing 100049, China

¹¹Beijing Academy of Quantum Information Sciences, Beijing 100193, China

¹²Center for High Energy Physics, Peking University, Beijing 100871, China

(Dated: May 26, 2023)

We present the first use of a tunable superconducting radio frequency cavity to perform a scan search for dark photon dark matter with novel data analysis strategies. We mechanically tuned the resonant frequency of a cavity embedded in the liquid helium with a temperature of 2 K, scanning the dark photon mass over a frequency range of 1.37 MHz centered at 1.3 GHz. By exploiting the superconducting radio frequency cavity's considerably high quality factors of approximately 10^{10} , our results demonstrate the most stringent constraints to date on a substantial portion of the exclusion parameter space, particularly concerning the kinetic mixing coefficient between dark photons and electromagnetic photons ϵ , yielding a value of $\epsilon < 2.2 \times 10^{-16}$.



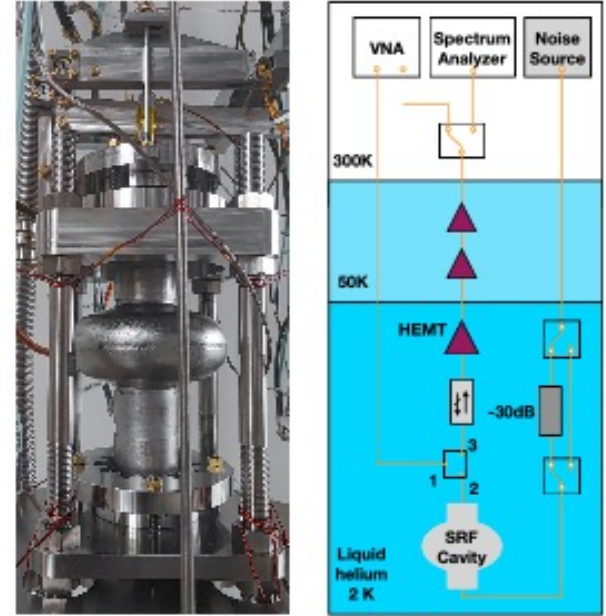



FIG. 1: Left: the single-cell SRF cavity equipped with frequency tuner. Right: Schematic of the microwave electronics for DPDM searches. The VNA measures the net amplification factor G_{net} of the amplifier circuit consisting of an isolator, a HEMT amplifier and two room-temperature amplifiers. The noise source and the spectrum analyzer calibrate the resonant frequencies f_0^i . The time-domain signals from the SRF, with sequential amplification, are finally recorded by the spectrum analyzer.

Simulated effective volume

$$V_{\text{eff}} = \frac{\left| \int dV E_z \right|^2}{\int dV |\mathbf{E}|^2}$$

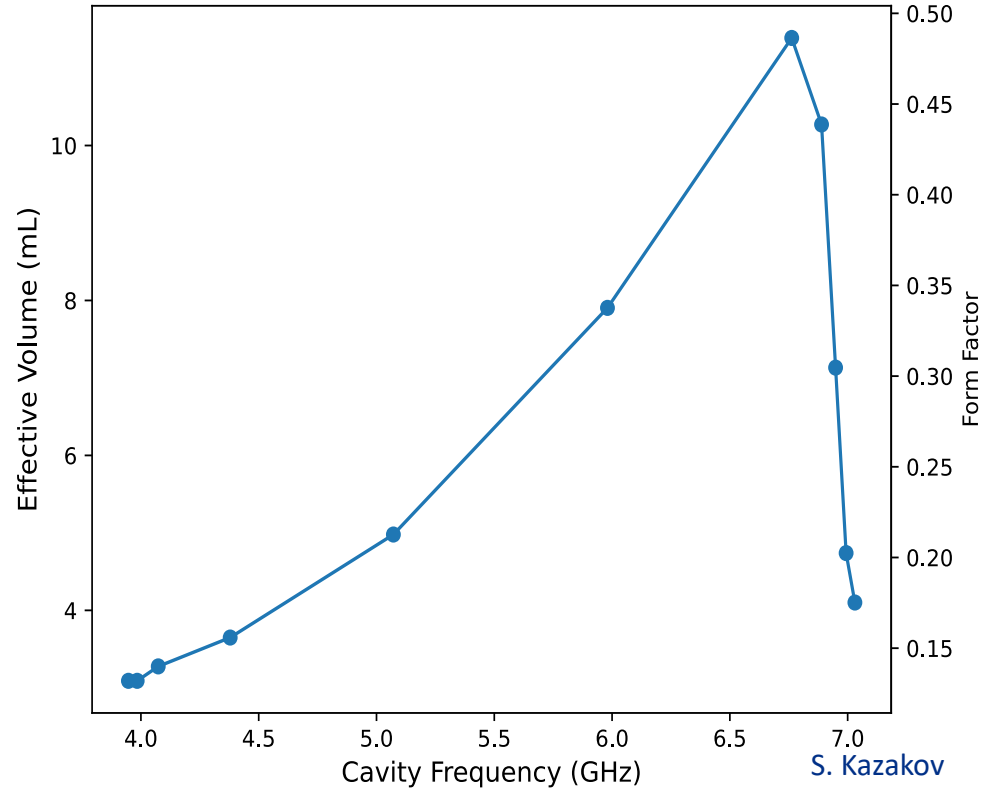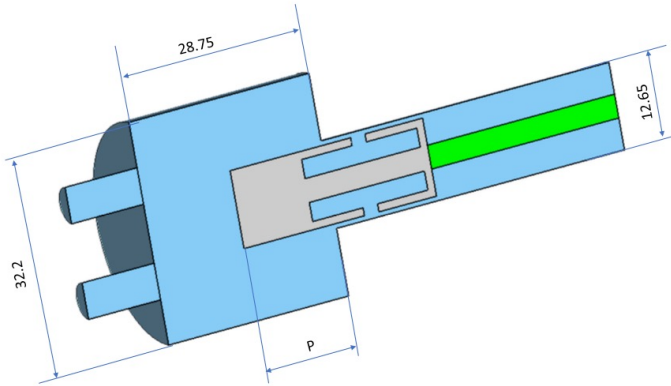


Microphonics FFT

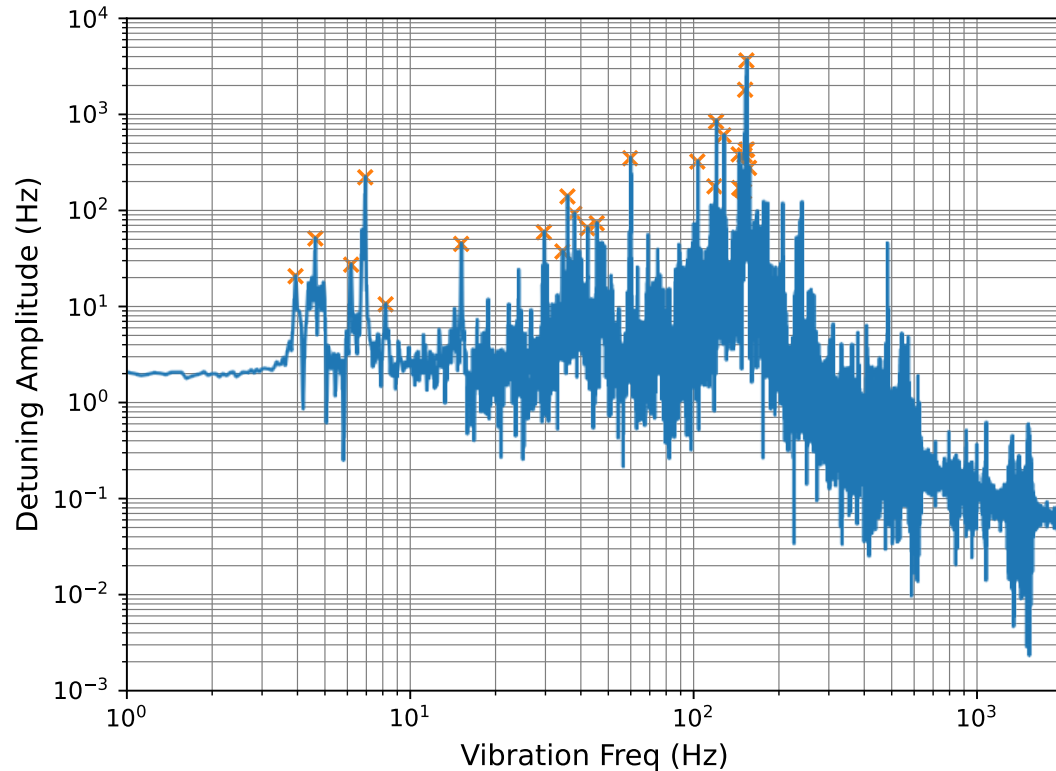

Vibration Frequency	Detuning amplitude / Vibration Frequency
6.9	31.9
153.6	23.7
151.9	11.9
4.6	11.0
120	7.0
59.7	5.9

Lots of microphonics in a helium bath

Resonance looks like this with a VNA.


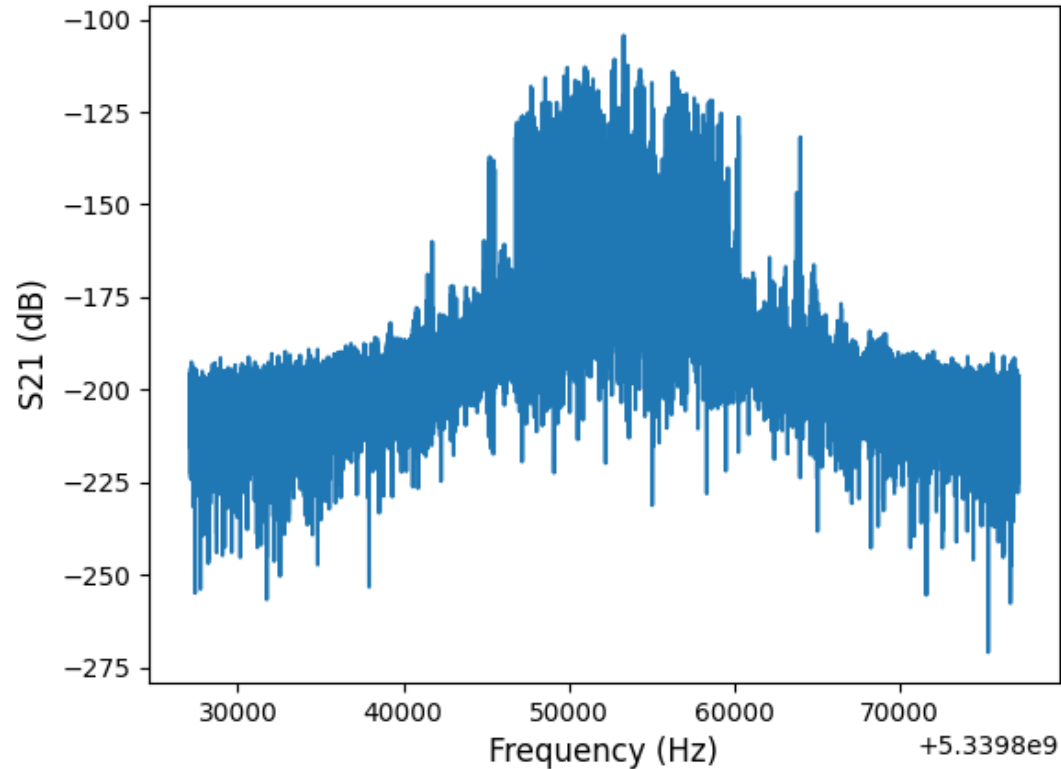


LHe vertical test stand facility at Fermilab





FNAL Nb₃Sn Cavities for ADMX and INFN


Initial R&D at Fermilab

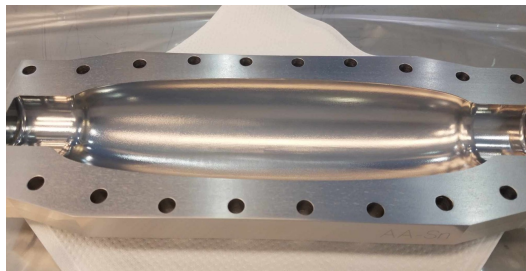



Nb₃Sn tuning rod for ADMX Sidecar sent to U. Washington (w/ LLNL)



ADMX-EFR at Fermilab



9 GHz Nb₃Sn cavity sent to INFN Frascati for testing in 8 T fridge



Hybrid dielectric-Nb₃Sn cavity for INFN QUAX haloscope

PHYSICAL REVIEW APPLIED

Highlights Recent Subjects Accepted Collections Authors Referees Search

Open Access

High-Quality-Factor Superconducting Cavities in Tesla-Scale Magnetic Fields for Dark-Matter Searches

S. Posen, M. Checchin, O.S. Melnychuk, T. Ring, I. Gonin, and T. Khabiboulline
Phys. Rev. Applied **20**, 034004 – Published 5 September 2023

SQMS Center

This material is based upon work supported by the U.S. Department of Energy, Office of Science, National Quantum Information Science Research Centers, Superconducting Quantum Materials and Systems Center (SQMS) under contract number DE-AC02-07CH11359

