Advancements in Muon Collider Calorimetry: Design, Testing, and Radiation Resistance of the Crilin Calorimeter Prototype

C. Cantone¹, A. Cemmi², S. Ceravolo¹, V. Ciccarella¹, F. Colao³, E. Di Meco¹, I. Di Sarcina², E. Diociaiuti¹, R. Gargiulo¹, P. Gianotti¹, C. Giraldin^{5,6}, E. Leonardi⁴, D. Lucchesi^{5,6}, M. Moulson¹, D. Paesani¹, N. Pastrone⁷, A. Saputi⁹, I. Sarra^{1,*}, J. Scifo², L. Sestini⁵, M. Soldani¹, R. Soleti⁸, D. Tagnani¹⁰, A. Verna², and D. Zuliani^{5,6}

Abstract. The Crilin calorimeter is a semi-homogeneous calorimetric system that uses Lead Fluoride (PbF₂) crystals with UV-extended Silicon Photomultipliers (SiPMs). Proposed for the Muon Collider, it requires high granularity to distinguish signal particles and address substructures for jet identification. Anticipating substantial occupancy due to beam-induced backgrounds, simulations indicate a photon flux with an average energy of 1.7 MeV and approximately 4.5 MHz/cm² fluence rate. Prioritizing time-of-arrival measurements within the calorimeter is crucial for associating clusters with interaction vertices. The calorimeter's energy resolution is vital for determining jet kinematics. Extensive radiation hardness studies confirm the system's effectiveness when operating in a challenging radiation environment, with exposure up to 10 kGy/year total ionizing dose (TID) and a neutron fluence equivalent to 10¹⁴ neutrons 1 MeV/cm²/year.

Prototype (Proto-1), with two layers of 3×3 PbF₂ crystals, achieved a timing resolution below 50 ps for energy deposits exceeding 1 GeV during 2023 tests. A comprehensive overview, including mechanics, electronics, and test beam outcomes, is presented. Construction is underway for a larger 9×9 crystal matrix prototype with 5 layers, to be completed in 2024. Testing is scheduled for the summer of 2025.

1 Introduction

The Muon Collider [1] is envisioned as a future highenergy physics facility, capitalizing on the distinctive characteristics of muons. Compared to electrons, muons emit considerably less synchrotron radiation, enabling more efficient high-energy collisions. However, their limited lifetime and decay products introduce significant Beam-Induced Backgrounds (BIB), posing a considerable challenge for detector technologies, particularly for the electromagnetic calorimeter (ECAL). In the ECAL region, simulations indicate a particle flux of approximately 300 particles per cm², predominantly photons (96%) and neutrons (4%), with an average photon energy of 1.7 MeV. The presence of BIB results in a demanding operational environment for the Muon Collider. To quantify radiation effects, a FLUKA simulation at $\sqrt{s} = 1.5$ TeV was performed to estimate the Total Ionizing Dose (TID) and neutron fluence across the detector interface. In the ECAL barrel region, the expected neutron fluence reaches 10¹⁴

 $n_{1\text{MeV}}/\text{cm}^2$ per year, with an associated total ionizing dose of 1 kGy per year.

A W-Si sampling calorimeter inspired by the CAL-ICE design was initially considered as a reference technology. Despite its advantages, this option involves significant complexity and cost. As an alternative, the Crilin calorimeter [2] is introduced in this study. This semi-homogeneous crystal calorimeter offers a cost-effective yet high-performance solution, specifically designed to mitigate the challenges associated with BIB in the Muon Collider environment.

2 Crilin Calorimeter: Concept and Key Characteristics

The Crilin calorimeter is being explored as a potential solution for the electromagnetic calorimetry requirements of a future Muon Collider. It utilizes an array of high-density crystal matrices, where each unit is read independently by two channels, each integrating a pair of Silicon Photo-Multipliers (SiPMs). This semi-homogeneous architecture

¹INFN, Laboratori Nazionali di Frascati, Via E. Fermi 54, 00044, Frascati, Italy

²ENEA Nuclear Dept, Casaccia R.C., Via Anguillarese 301, 00123, Rome, Italy

³ENEA Nuclear Dept, Frascati R.C., Via Enrico Fermi 45, 00044, Frascati, Italy

⁴INFN Sezione di Roma, Piazzale Aldo Moro 2, 00185, Rome, Italy

⁵INFN Sezione di Padova, Via Francesco Marzolo 8, 35131, Padova, Italy

⁶Università degli Studi di Padova, Via 8 Febbraio 2, 35122 Padova, Italy

⁷INFN Sezione di Torino, Via Pietro Giuria 1, 10125, Turin, Italy

⁸Donostia International Physics Center, Manuel Lardizabal Ibilbidea, 4, 20018 Donostia, Gipuzkoa, Spain

⁹INFN, Sezione di Ferrara, Via Saragat 1I, 44122, Ferrara, Italy

¹⁰INFN, Sezione di Roma Tre, Via della Vasca Navale 84, 00146, Rome, Italy

^{*}e-mail: ivano.sarra@lnf.infn.it

provides notable advantages, including precise timing, fine granularity, longitudinal segmentation, resilience to radiation, and cost-effectiveness.

2.1 Structural Design and Optimization

To comply with the stringent demands of the Muon Collider, the Crilin calorimeter is designed to achieve a timing resolution below 100 ps, crucial for mitigating Beam-Induced Backgrounds (BIB) and isolating physics signals. The fine spatial resolution, defined by a cell size of $10 \times 10 \, \mathrm{mm^2}$, enables efficient separation of background events from actual particle interactions, reducing occupancy per channel.

The calorimeter comprises five detection layers, each 45 mm in length (40 mm for the crystal and 5 mm for the readout system), ensuring effective longitudinal segmentation. This segmentation is essential for distinguishing and suppressing spurious showers originating from BIB. Compared to a conventional W-Si calorimeter, which typically requires 40 layers, the Crilin design reduces the number of readout channels and associated electronics by a factor of 10. This optimization results in a more compact and cost-efficient detection system, making it an attractive candidate for future collider experiments.

2.2 Material Selection and Radiation Hardness

The Crilin calorimeter relies on radiation-resistant crystals, such as PbF₂ [4] and PbWO₄-UF [5], which have demonstrated stable performance under high radiation exposure. PbF₂ crystals retain their optical transmittance after exposure to Total Ionizing Doses (TID) up to 260 kGy, as tested at the Calliope gamma Facility (ENEA NUC-IRAD-GAM Laboratory). PbWO₄-UF crystals, on the other hand, withstand doses up to 1.5 MGy [3]¹.

In addition to crystal selection, SiPMs have undergone extensive radiation qualification. Hamamatsu S14160-3010PS SiPMs, with a 10 μ m pixel size, exhibit only a minor increase in dark current when subjected to a neutron fluence of 10^{14} n_{1MeV-eq}/cm² and a TID of 10 kGy. This performance surpasses that of the S14160-3015PS model with a 15 μ m pixel size, confirming their suitability for prolonged operation in a high-radiation environment. Given the anticipated radiation levels at the Muon Collider—approximately 1 kGy/year TID and a neutron fluence up to 10^{14} n_{1MeV-eq}/cm²—the use of radiation-hard materials is essential to ensure the longevity and reliability of the calorimeter system.

2.3 Performance Evaluation

The Crilin ECAL has undergone extensive simulation and experimental validation, demonstrating promising performance. Simulations indicate an energy resolution of $\sigma_E/E \approx 4.8\%/\sqrt{E} \oplus 0.2\%$ for photons. This result is competitive with traditional sampling calorimeters, exhibiting good calorimetric properties, although naturally

degraded by the BIB contribution, leading to a resolution of approximately $15\%/\sqrt{E}$. Further optimization of the clustering algorithms is ongoing to better exploit the longitudinal information and suppress fluctuations due to BIB. Figure 1 summarizes these results.

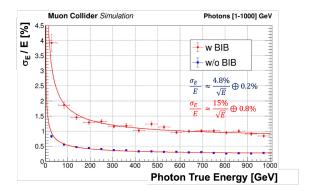


Figure 1. Simulated energy resolution in the Muon Collider framework with and without BIB contributions.

Two preliminary prototypes have been developed and tested. Proto-0 [6], featuring two crystals and four channels, and Proto-1, integrating two layers of a 3 × 3 crystal matrix read out by 36 channels, demonstrated excellent time resolution (on the order of 20 ps) and good agreement with Monte Carlo simulations, validating the design's performance. For R&D purposes, two different SiPM circuit configurations were tested: the first layer had two readout channels per crystal connected in series, while the second layer had them connected in parallel. In August 2023, Proto-1's timing performance was evaluated with a 120 GeV electron beam at CERN-SPS H2, testing different configurations by measuring time differences between the two layers and between channels within the same crystals. The central elements of the matrix, where the highest energy deposits occur, were analyzed. As shown in Figure 2, for both the series and parallel layers, the time resolution remained below 40 ps for energy deposits greater than 1 GeV.

The time resolution achieved using the time difference between the two most energetic crystals from different layers was well within requirements. As shown in Figure 3, a Double Sided Crystal Ball fit yielded a $\sigma_{\Delta t}$ of 45 ps, primarily dominated by digitizer board synchronization jitter, measured to be $O(32 \,\mathrm{ps})$ for board-to-board cases and $O(10 \,\mathrm{ps})$ for channel-to-channel cases.

In April 2024, a final Proto-1 test was conducted at the Frascati Beam Test Facility (BTF) to systematically study light yield loss due to γ -irradiation. A 450 MeV electron beam with single-particle bunches was used to center the beam on each crystal of the series layer before and after irradiation, measuring charge deposition. Crystals were tested with two different wrappings—Teflon and Mylar—each subjected to a total ionizing dose (TID) of up to 80 kGy. Light yield (LY) loss was evaluated by analyzing variations in charge and the number of photoelectrons. Figure 4 summarizes the $N_{p.e.}$ variations.

¹Dose values measured in air.

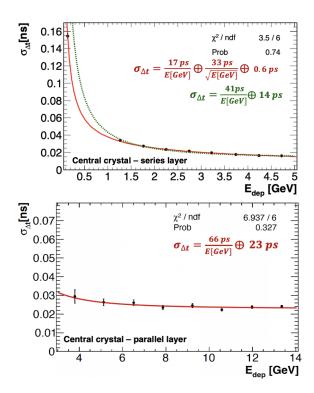


Figure 2. Time resolution as a function of the energy deposited in the crystal with the highest energy deposit. A time resolution measurement with a 450 MeV electron beam was added for the series layer (solid red line fit).

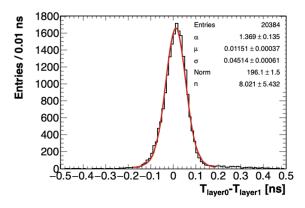
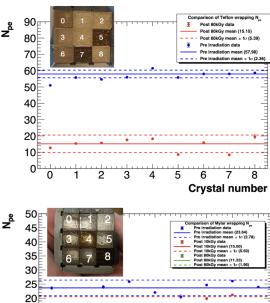


Figure 3. Time resolution for the time difference between the two most energetic crystals from different layers. A Double Sided Crystal Ball fit yields a resolution of 45 ps, mainly dominated by digitizer board-to-board jitter.

This test provided critical insights into the prototype's components:

- Significant variability was observed in crystal response to radiation, despite vendor claims of high-purity (> 99.9%) PbF₂ powders used in crystal growth.
- Crystals exhibited noticeable transparency loss, appearing uniform along the longitudinal axis.
- Teflon wrapping became damaged and brittle, indicating that Mylar should be preferred, despite its suboptimal reflectivity for UV Cherenkov light.



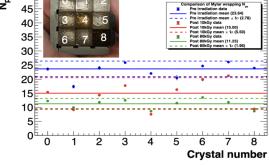


Figure 4. Variation in the number of photoelectrons after exposure to a TID of up to 80 kGy with two different wrapping configurations: Teflon (top) and Mylar (bottom). For Mylar, an intermediate LY measurement was performed at 10 kGy (green markers and line). Crystal transmittance loss is also visible.

• SiPM dark counts increased significantly with absorbed dose: pedestals for the no-dose (3 MeV ENE²), 80 kGy (18 MeV ENE), and 160 kGy (24 MeV ENE) cases show a significant widening of the σ , indicating an increase in dark current with the absorbed dose.).

Further studies are required to better understand these effects, which appear to be more significant than those attributable solely to transmittance loss. Future irradiation tests will include monitoring the response of the crystal-SiPM system with a blue laser and isolating SiPMs to disentangle the contributions of photon detection efficiency (PDE) and transmittance loss.³

2.4 New Prototype

A new prototype consisting of five layers of 7×7 crystal matrices will be fully developed, built, and tested during 2025, reaching 2 Molière Radius, 22 radiation lengths.

The mechanics and electronics will have significant changes compared to the previous prototypes. An aluminum matrix with 150 µm thickness will hold the crystals, and a thicker (2.5 mm) external envelope will surround the matrix, also providing cooling through microchannels. Moreover, a micro-coaxial Kapton strip will

²Equivalent Noise Energy.

³Photon Detection Efficiency (PDE) of a SiPM is the product of quantum efficiency, fill factor, and Geiger probability, typically ranging from 20% to 50%, depending on wavelength and design.




Figure 5. Sketch of the final prototype embedding five layers of 7×7 crystal matrices.

provide SiPM polarization and readout independently for each channel of two SiPMs in series. An overall connector will be placed at the back of the five assembled modules. A sketch of the final Crilin version is shown in Figure 5. This final version, featuring a total of $2 M_R$ and $22 X_0$, will provide enough coverage to finely study the energy resolution performances together with the timing information.

3 Conclusions

The Crilin calorimeter represents a promising alternative to traditional sampling calorimeters for the future Muon Collider, addressing the challenges posed by beam-induced backgrounds (BIB) while offering improved performance and cost efficiency. Its unique semi-homogeneous design, employing a series of matrices of high-density crystals and Silicon Photo-Multipliers (SiPMs), has demonstrated excellent time resolution and energy measurement accuracy in both simulations and experimental validations. The prototypes of the Crilin calorimeter have shown that it can achieve a timing resolution of less than 45 ps and maintain good energy resolution in the presence of BIB.

Recent beam tests have highlighted great time resolutions (better than 45 ps for energy deposits greater than 1 GeV) but also areas for further investigation, particularly the light yield loss in crystals due to radiation exposure. The observed variability in crystal response, damage to Teflon wrapping, and increased SiPM dark counts emphasize the need for further studies. The Crilin calorimeter represents a significant step forward in calorimeter technology, offering a high-performance,

cost-effective solution for the future Muon Collider. A significant milestone awaits in 2025 when a substantially larger prototype, covering 2 Molière Radius, 22 radiation lengths, and 1 interaction length, will be developed, marking a significant advancement in the calorimeter design.

4 Acknowledgment

This work was developed within the framework of the International Muon Collider Collaboration (https://muoncollider.web.cern.ch), where the Physics and Detector Group aims to evaluate potential detector R&D to optimize experiment design in the multi-TeV energy regime. This work was supported by the EU Horizon 2020 Research and Innovation Programme under Grant Agreements No. 101006726 and No. 101004761.

The authors thank the LNF Division Research and ENEA NUC-IRAD-GAM Laboratory (Casaccia R.C.) for their technical and logistic support. They also thank the BTF staff for providing the beam time and helping them get a smooth running period.

References

- [1] C. Accettura et al., *Towards a Muon Collider*, Eur. Phys. J. C (2023) 83: 864; DOI: https://doi.org/10.1140/epjc/s10052-023-11889-x.
- [2] S. Ceravolo et al., Crilin: A CRystal calorImeter with Longitudinal InformatioN for a future Muon Collider, JINST 17 P09033 (2022); DOI: 10.1088/1748-0221/ 17/09/P09033.
- [3] C. Cantone et al., *R&D* status for an innovative crystal calorimeter for the future Muon Collider, IEEE Transactions on Nuclear Science PP(99):1-1 (2024); DOI: 10.1109/TNS.2024.3364771.
- [4] A. Cemmi et al., *The CRILIN calorimeter: gamma radiation resistance of crystals and SiPMs*, JINST 19 P10016 (2024); DOI: 10.1088/1748-0221/19/10/P10016.
- [5] M. Korzhik. et al., Ultrafast PWO scintillator for future high energy physics instrumentation, Nucl. Instrum. Meth. A 1034 (2022); DOI: 10.1016/j.nima. 2022.166781.
- [6] C. Cantone et al., Beam test, simulation, and performance evaluation of PbF2 and PWO-UF crystals with SiPM readout for a semi-homogeneous calorimeter prototype with longitudinal segmentation, Frontiers in Physics 11 (2023); DOI: 10.3389/fphy.2023.1223183.