

ALIGNMENT AND STABILITY OF THE TPS STORAGE RING AUTO-TUNING GIRDER SYSTEM

T.C. Tseng, W.Y. Lai, C.J. Lin, H.S. Wang, M.L. Chen, H.C. Ho, S.Y. Perng, K.H. Hsu, D.G. Huang, P.S. Chuang, C.W. Tsai, C.K. Kuan, J.R. Chen, NSRRC, Hsinchu 30076, Taiwan

Abstract

An auto-tuning girder system for the Taiwan Light Source(TPS) storage ring had been designed and established to align the girders quickly also precisely with only little manpower. During the installation period, with the survey network data from the laser trackers, this girder system demonstrated the ability and met the design requirements. Including the testing run, with only 4 times tuning, the storage ring girders were aligned within $\pm 0.5\text{mm}$ precision and the first light was seen in few days after commissioning started. Within one year commissioning period afterward, several survey works had been carried out and the data show that the girder system is quite stable even suffered with some earthquakes. This paper describes the girder system and survey data in detail.

INTRODUCTION

The TPS (Taiwan Photon Source) construction project aimed to build a high brilliant and the very low emittance 3Gev ring with 518m circumference [1]. This project started formally from 2006 while a feasibility study was initiated in 2004. To meet the stringent beam dynamic specs, all the magnets should be located at precise positions and also firmly supported. However, considering the deformation of the floor and limited space in the tunnel also frequent earthquake in Taiwan, to align the girders precisely and quickly with less manpower is essential and an automatic-tuning girder system is thus proposed.

The design goal of the girders system for TPS is:

- To firm support and precise positioning of magnets
- Whole ring automatic alignment
- Precise resolution (μm)
- Beam based girder alignment (proposed)

In order to fulfil these challenging ambitions, a 6-axis motorized adjusting mechanism thus demanded. This girder system design is a modification from the girder system used in SLS (Swiss Light Source) by extending a 3 grooves type kinematic mounting from 3 balls to 6 balls and with a few major considerations:

- More contact points with locking system to raise natural frequency and reduce deflection.
- All contact points persist rolling contact when adjusting to reduce friction and remain high mobility.
- Contact stress is less than elastic limitation to reduce friction wear and keep high reliability.

In 2005, a preliminary study prototype bending section with 3 girders had been established for a test. This prototype proved the 6 axes adjustability with less than 1

μm resolution but the contact stress is exceed the elastic limitation due to point contact and wear occurred after a lifetime test [2-6].

In 2009, after the design stage of TPS is almost finished, a nearly real size testing mock-up system was set up in NSRRC fab for a system test and final examination [7-9]. After a few modifications, all hardware systems went into mass production processes.

From 2010, during the civil construction period, all the sub-systems were carefully assembled and calibrated in a rental factory outside NSRRC. A third mock-up system was set up again to modify interferences or mistakes [8-11].

After the tunnel completed, starting in January 2013, the pedestals were to be set out, anchor bolts drilling and installed with the accuracy around $\pm 1\text{mm}$. Upon completion of installation, the pedestals were grouted to the ground. There were 2 bending sections installed at July as an on-site mock-up testing system and the entire system installation began from October at a rate of 2 sections per week.

The whole storage ring girders were completed craned at March 2014 and finished control system installation test at May. In August, a whole ring girder automatic alignment was really performed the first time and it takes only 1900 seconds (32 minutes). In October, a second automatic alignment was performed to further minimize the deviations. Then, after the problem of high permeability booster vacuum chambers was discovered and solved, the commissioning of both rings were quick and accumulated beam took place at the end of 2014.

After nearly one year commissioning and insertion devices installation, the beam current reached 520mA. Finally, TPS was inaugurated at Sep.19 2016 with 7 beamlines, officially made the facility available to researchers worldwide.

GIRDER SYSTEM DESIGN

According to the six-fold symmetric configuration DBA lattice design, 3 consecutive girders were used to accommodate one bending section magnets with the 2 dipole magnets assembled on side girders. With 4 bending sections to form a superperiod as in Fig. 1, there are 3 girder types and 72 girders total for the storage ring. With an electric levelling sensor (Leica Nevi 220) on each girder and touch sensors (Heidenhain Acanto AT1218 absolute length gauge) between consecutive girders in addition with a laser PSD (Position Sensitive Detector) system between straight section girders, a feedback controlled full ring automatic tuning girder system is established as in Fig. 2.



Figure 1: One superperiod girder configuration of the TPS storage Ring.

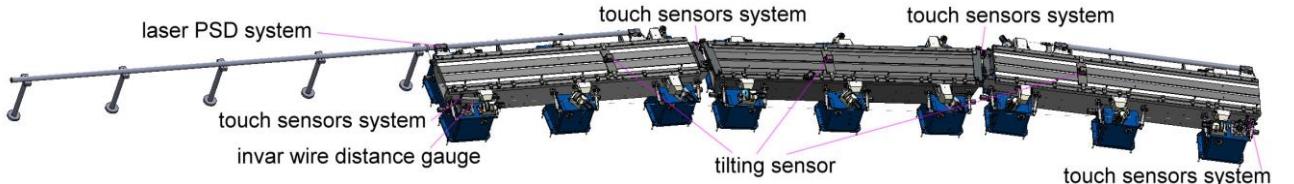


Figure 2: One superperiod girder configuration of the TPS storage Ring.

One girder system design

The girder adjusting system design is a modification of a 3 grooves type kinematic mounting by extending 3 balls to 6 balls as in Fig.3. Each 2 balls contact with one groove can be imaged as a part of a big ball that encloses and is tangent to the 2 balls. Replacing the balls with ball transfer units, expanding them further and equally spacing along the girder, replacing the contacting groove's surfaces with cam movers, putting each 2 cam movers on opposite side of the girder on a pedestal, then a girder system with 6 cam movers on 3 pedestals was established as shown in Fig.4.

A major design modification to the cam mover was made after the first prototype. The size of the cam is enlarged from diameter 130mm to 140mm and a recess arc of radius (45.2mm) slightly larger than the SP90 transfer unit ball radius (45mm) is put on the contact position then the contact positions of the ball and the cam remain the same but the contact situation changes from point contact to line contact as shown in Fig 5. It not only reduce the contact stress but also preserve the advantage of kinematic mounting and will still resume the existing adjusting algorithm [2] of single girder. From the Herz contact stress calculation, the stress is reduced drastically and far beyond the elastic limitation of the cam.

In this design the ball will always contact with the cam at the recess arc area, so the cam could not be rigidly connected and rotate simultaneously with the shaft. An additional E5009 type bearing is placed between the cam and the shaft, then the cam will swing with the ball or the ball will rolls along the arc area in the axial direction at adjustment. Thus, the conditions of kinematic mounting are still met in this design only there will be slightly differential friction when the ball rolls along the arc area in the axial direction. The differential friction is only about 3% due to radius change and is met the spec of a normal bearing, besides, this is a slow speed adjusting mechanism and will not operate continuously. The friction wear due to this phenomenon is negligible.

The locking mechanism is a wedge type DC motor driving stage inserted between girder and pedestal in

order to raise the natural frequency and reduce vibration magnification of the girder system.

There are 3 hard stop shafts across the pedestal and girder body that limit the girder adjusting range to $\pm 0.5\text{mm}$ after all the components of the ring are installed. In Addition, these shafts also secure the girder from earthquake jumping.




Figure 3: Expand 3-Groove type kinematic mounting from 3 balls to 6 balls

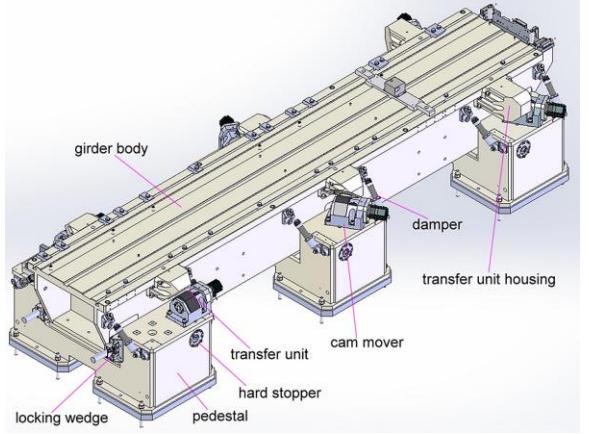


Figure 4: One girder configuration.

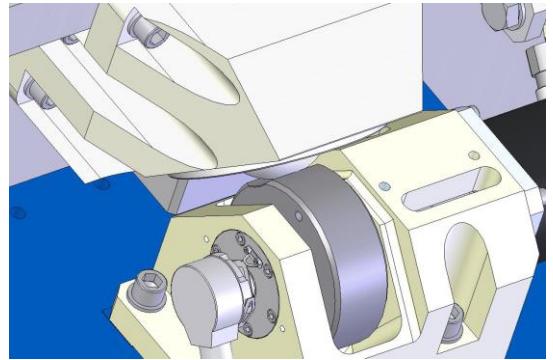


Figure 5: Cam mover design modification.

Magnet clamping design

The girder is of a table type design basically and there are 3 magnet installation referencing channels precisely machined within $15\mu\text{m}$ tolerance to keep the magnets aligned precisely. The magnet was pre-assembled on a mounting base. The mounting base was also precisely machined within $15\mu\text{m}$ tolerance. When assembled on the girder, two side channels can keep the magnets on the same height with minimized rotation. Then the mounting base will be pushed to closely touch the side of center channels with an inclined clamer. The clamer produces a horizontal pushing force to make sure the magnet base contact with the center reference channel. The right screw for the clamer is locked with a constant 1400 kg.cm torque, while the left screw 1000 kg.cm as show in Fig. 6.

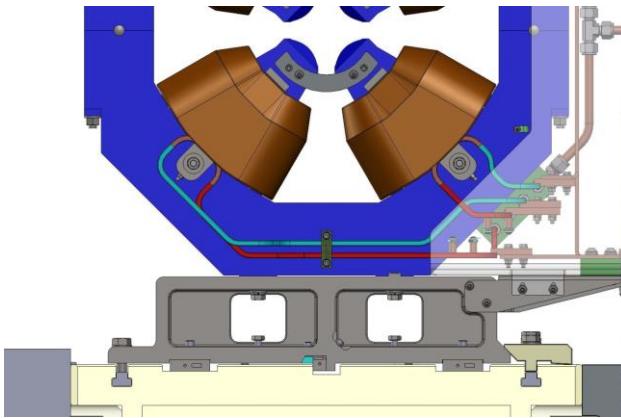


Figure 6: Magnet clamping design.

Control system

TPS girder control system consists of twenty four local girder control systems and a global girder-position computer. Each local control system controls 3 girders of a bending section. It consists of 5 sub-systems: cam mover control, rotational encoder with touch sensor reading, tilting sensor reading, PSD reading and locking control.

In order to automatic adjust the girders quickly and precisely, 2 major algorithms had been developed. An auto-alignment algorithm optimizes the girder adjustment quantities according to the deviation reading from sensors and a girder adjustment algorithm transfer the girder adjustment quantities to the mover motor's rotating degrees[8,9].

The global girder-position computer grabs each girder's deviation values in six degree of freedom from sensor's reading and calculates all girders best positions by minimizing global girder position errors according to the auto-alignment algorithm. Then the local girder control systems determines the rotating angles of the mover motors by the girder adjustment algorithm with the adjustment quantities from the global girder-position computer via intranet. Fig. 7 shows the network and system architectures of the girder control system.

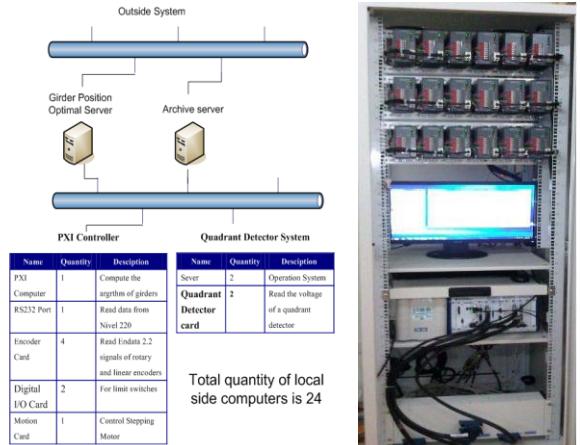


Figure 7: Network and system architectures of the girder control system.

SURVEY ALIGNMENT WORKS

Taiwan photon Source started to break ground at February 2010. Accompanying with construction of the main building, there are GPS pillars set up as civil construction control points. With the progress of construction, benchmark points were expanded to form the entire survey network for the accelerator installation as in Fig. 8 [12].

With the survey data from the sockets at tunnel walls and experimental hall columns, a seasonal expansion and shrinkage about 3 mm in radius direction according to the temperature change can be observed and a small displacement of (-3,-1) and rotation of 0.0021 degree (about 5mm at lattice position) clockwise of the virtual center were derived and a coordinate values adjustment of all components were decided accordingly. However, as the storage ring temperature control available from May 2014, the situation seems moderated as in Fig. 9 but still need to accumulate survey data monthly later on for future operation reference.

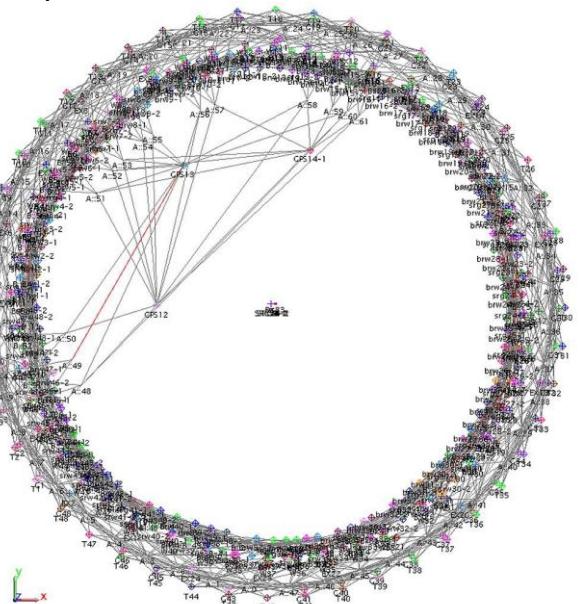


Figure 8: The survey network of TPS

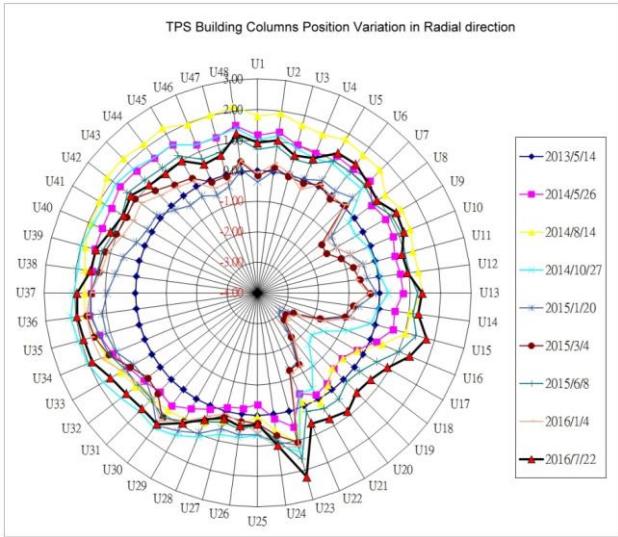


Figure 9: The TPS building variation in radius direction

GIRDERS INSTALLATION AT TPS TUNNEL

After the tunnel completed, starting in January 2013, the pedestals were to be set out, anchor bolts drilling and installed at the accuracy around $\pm 1\text{mm}$. Upon completion of installation, the pedestals were grouted to the ground. Two bending sections were installed at July as a mock-up testing system and the entire system installation began from October at a rate of 2 sections per week as in Fig. 10. The whole storage ring girders were completed craned at March 2014 and finished control system installation test at May as in Fig.11 [13].

As each 2 girder sections installed, the position deviation were examined with a laser tracker and mostly were around $\pm 1\text{mm}$ within the adjusting range and were adjusted with local network to less than 0.1mm .



Figure 10: Girder installing with a cradle by a crane



Figure 11: The whole ring girders installed at TPS tunnel

AUTO ALIGNMENT PREPARATION AND IMPLEMENTATION

A laser PSD magnet centring measurement had been established to check the alignment deviations of each magnet machine center when installed at the girder. The work had been started at the rental plant at a repeatability of $2\mu\text{m}$. Due to the tight schedule, 3/4 ring magnets were examined at tunnel at a repeatability of $10\mu\text{m}$ when the air conditioning and temperature control was still unavailable. However, the RMS errors of $18.5\mu\text{m}$ and $20.4\mu\text{m}$ in vertical and horizontal direction respectively still meet the spec of beam dynamic as in Fig.12.

As the girders finished installation, the important works were the inspection of the connection of the sensors with the control system. After about 2 months examination and further calibration including some damage sensors replacing, in the middle August, the storage ring were preliminary automatically aligned and the booster ring were manual aligned according to the laser tracker survey network with the deviations within $\pm 0.5\text{mm}$. The adjustment time for storage ring (72 girders) is about 1900 seconds once time. In October, a second automatic alignment was performed to further minimize the deviations as in Fig.13. From the commissioning results, the measured COD is quite closed to the simulated one from sub-system deviation data and even better [14,15].

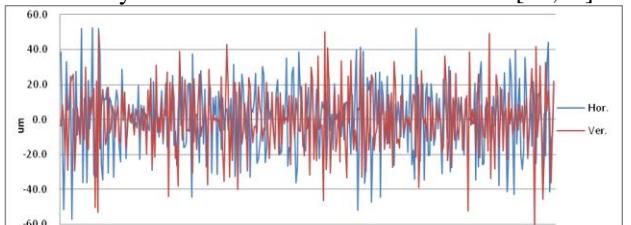


Figure 12: The position deviations of each magnet center when assembled on the girder

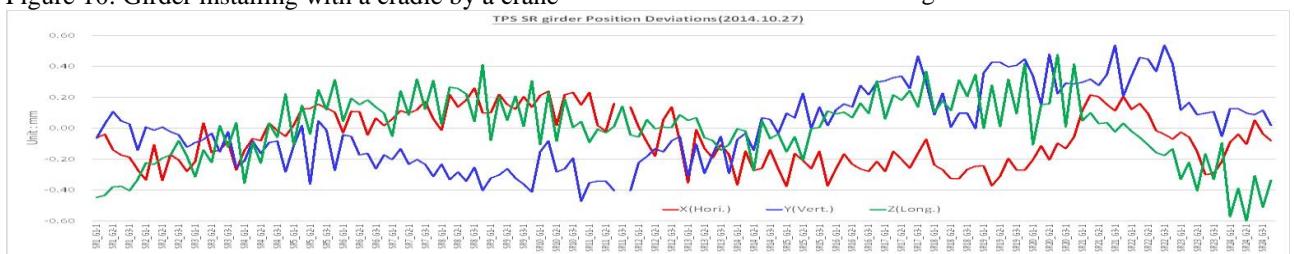


Figure 13: The laser tracker survey network errors of girders after second auto-alignment

GIRDER STABILITY DURING COMMISSIONING PERIOD

From 2015 to September 2016, more than one and half years commissioning period including insertion devices installation and beamlines construction. A few survey works had been carried out. Meanwhile, An earthquake of Richter scale 6.6 damaged south Taiwan at Feb. 6, 2016. However, the intensity scale in Hsinchu is only 2~3 and the deviations between girders were less than 5 um and mostly returned to less than 1um since the girder is of kinematic mounting design as shown in Fig. 14.

The survey data as in Fig. 15 shows that the entire stability is preserved but some places are deviated more than 0.5mm in the vertical direction and need to be further checked. However, the commissioning team still do not need to re-align the girders and the entire TPS storage ring girder system has not been adjusted since last auto-alignment for nearly 2 years.

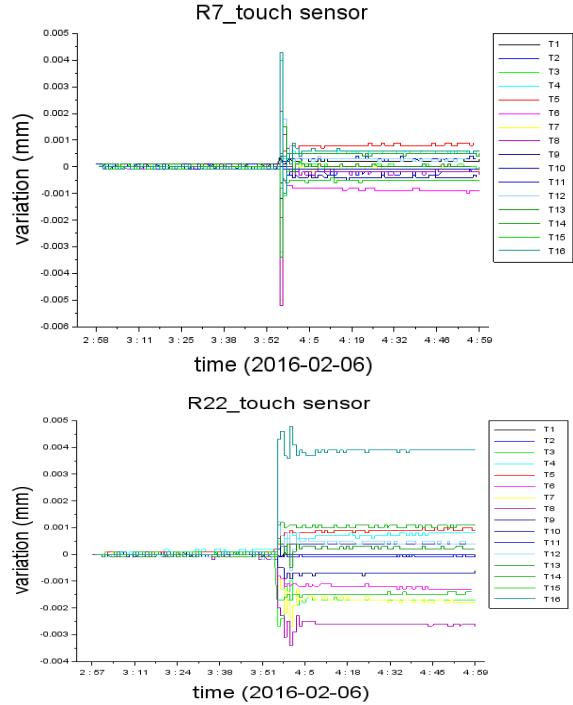


Figure 14: deviation readings between girders in an earthquake

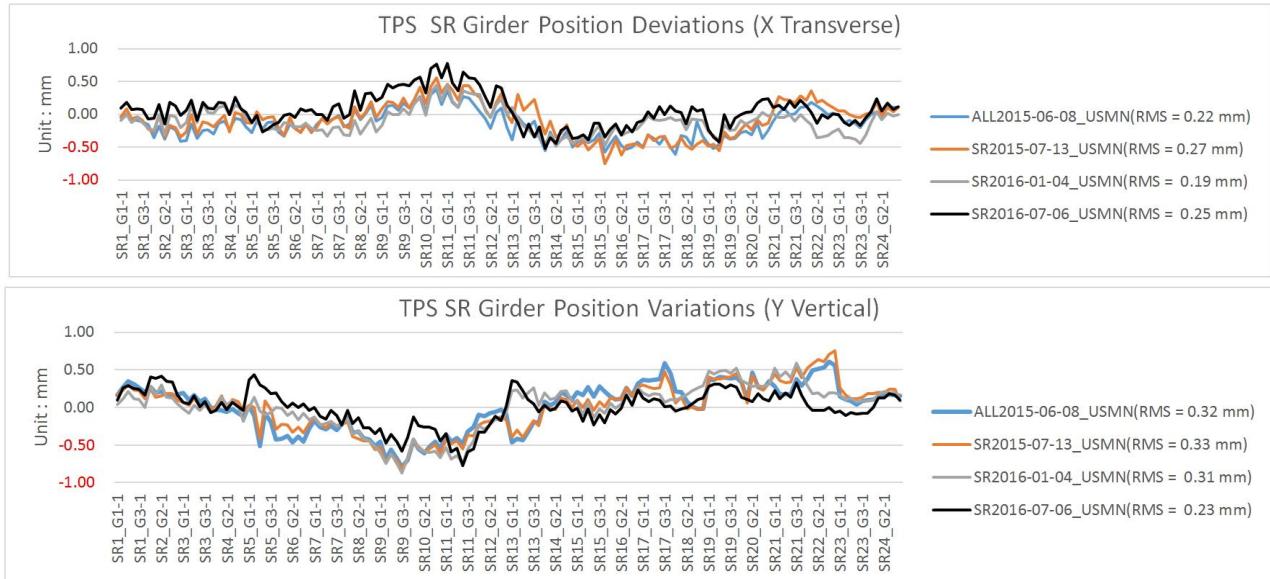


Figure 15: The deviations of girders measured with the laser tracker survey network from 2015 to 2016

CONCLUSION

TPS girder system including storage ring, booster ring and transport line were finished installation August 2014. A laser tracker survey data based full ring auto-alignment had been performed and shows good conditions for smoothly commissioning and the stability is still good during 2 years operation.

The laser tracker survey results show that the full ring accuracy is about $\pm 0.5\text{mm}$.

The sensor's durability is quite a problem for the auto-alignment system, however, the quartz glass bar test shows a feasible solution toward the sensor based girder auto-alignment.

REFERENCES

- [1] NSRRC website: <http://www.nsrrc.org.tw/english/tps.aspx>
- [2] T.C. Tseng et al, "A precise 6-axes girder system with cam mover mechanism", MEDSI(2006)

- [3] T.C. Tseng et al, “Design and prototype testing of the girder system for TPS”, SRI(2008)
- [4] K.H. Hsu et al, “The vibration test and improvement of the TPS prototype girder”, MEDSI(2008)
- [5] H.S. Wang et al, Design and test of a PSD system for the TPS girder, MEDSI(2008)
- [6] W.Y. Lai et al, The design and prototype tests of a whole-ring girders auto alignment system for TPS, PAC(2009)
- [7] M.L. Chen et al, Design improvements and tests of a laser positioning system for TPS girder system, MEDSI(2010)
- [8] T.C. Tseng et al, From survey alignment toward auto-alignment for the installation of the TPS storage ring girder system, IPAC(2011)
- [9] H.S. Wang et al, Design and testing of a girder control system at NSRRC, ICALEPICS(2011)
- [10] H.S. Wang et al, Design and testing of a locking system in a girder at NSRRC, MEDSI(2012)
- [11] C.S. Lin et al, Modal testing for the girders with multi-stage adjustable dampers in Taiwan Photon Source, MEDSI(2012)
- [12] W.Y. Lai et al, Alignment Design and Status of Taiwan Photon Source, IWAA(2014)
- [13] T.C. Tseng et al, “Installation And Implementation Of An Auto-Alignment Girder System For TPS Storage Ring”, MEDSI(2014)
- [14] C.C. Kuo et al, “Commissioning of the Taiwan Photon Source”, PAC(2015).
- [15] T.C. Tseng et al, “The Auto-Alignment Girder System of TPS Storage Ring”, PAC(2015)